



PowerFlex 755TM Power and Filter Modules Unpacking and Lifting Instructions

Catalog Numbers 20-750-MLn-xnnnxnnn, 20-750-MLn-xnnnxnnn, 20-750-MNn-xnnnxnnn

Topic	Page
Summary of Changes	1
Before You Begin	1
Unpack and Inspect the Module	1
Read the Lifting Precautions	2
Maximum Module Weights	2
Lift the Module	2
Additional Resources	4

Summary of Changes

This publication contains the following new or updated information. This list includes substantive updates only and is not intended to reflect all changes.

Topic	Page
Updated the Maximum Module Weights table to include the PowerFlex® 755TM Non-Regenerative Supply (NRS) catalog numbers.	2
Added a illustration of catalog numbers 20-750-MNn-xnnnxnnn lift holes.	4
Updated the Additional Resources table to include the new PowerFlex 755TM Non-Regenerative Supply publication.	4

Before You Begin

Complete these tasks before you unpack and lift a power, LCL filter, or NRS module out of the shipping container.

- Prepare all equipment and hardware that is used to lift the module. A hoist, straps, and J-hooks with a lockable clasp capable of supporting the maximum module weight are recommended. See Maximum Module Weights on page 2.
- Install the other required IP00 Open Type kits in the enclosure before you install a power, LCL filter, or NRS module. See the PowerFlex 755TM IP00 Open Type Kits Installation Instructions, publication [750-IN101](#), for details.
- If used, assemble the module service cart (20-750-MCART1). The module service cart is used to secure and transport modules for installation and removal. See the PowerFlex 750-Series Service Cart and DCPC Module Lit, Installation Instructions, publication [750-IN105](#) for information on how to assemble and use the cart. The module service cart must be used with the IP00 power, LCL filter, and NRS module floor-mount bracket kits (20-750-MMNT1-FnM) installed in an enclosure. See the PowerFlex 755TM IP00 Open Type Kits Installation Instructions, publication [750-IN101](#), for more information.
- If used, prepare the module storage hardware (20-750-MINV-ATIP). The module storage hardware is used to stabilize power, LCL filter, and NRS modules for storage in an upright position. See the PowerFlex 755TM Power and Filter Module Storage Hardware Installation Instructions, publication [750-IN106](#), for information on how to assemble, and use the hardware.

Unpack and Inspect the Module

Upon delivery, follow these steps to unpack and inspect the module.

IMPORTANT Delivery of equipment from Rockwell Automation to the carrier is considered delivery to the buyer. The carrier becomes liable for any damage that occurs during transit. It is the responsibility of the buyer to notify the proper party if damage is found. The buyer can forfeit any right to recovery for loss or damages by failing to comply with these steps.

1. Inspect the shipping container for any damage that occurred during transit.
2. Remove the cover of the shipping container.
3. Optionally, remove the sides of the shipping container.
4. Remove the protective packing materials and desiccant packages.
5. Inspect the module for any damage.
6. If damage to the module exists, contact the carrier that delivered the shipment and your Rockwell Automation sales representative to schedule an inspection.
7. Retain all product packaging for review by the carrier.

Read the Lifting Precautions

Read these precautions before you attempt to lift a power, LCL filter, or NRS module.



ATTENTION: All equipment and hardware that is used to lift the module must be properly sized and rated to lift and hold the weight of the module safely. To guard against possible personal injury or equipment damage:


- Inspect all hardware for proper attachment before a module is lifted.
- Do not allow any part of the module or lift equipment to contact electrically charged conductors or components.
- Do not subject the module to high rates of acceleration or deceleration during a lift or transportation.
- Do not allow personnel or their limbs directly beneath the module during a lift.

Tip-over Hazard



ATTENTION: Power, LCL filter, and NRS modules have a high center of gravity and a tip-over hazard exists. To guard against death, serious personal injury, or equipment damage, do not subject the module to high rates of acceleration or deceleration while transporting. Do not push or pull above the points that are indicated on the module.

This label, affixed to the module chassis, identifies the center of gravity.

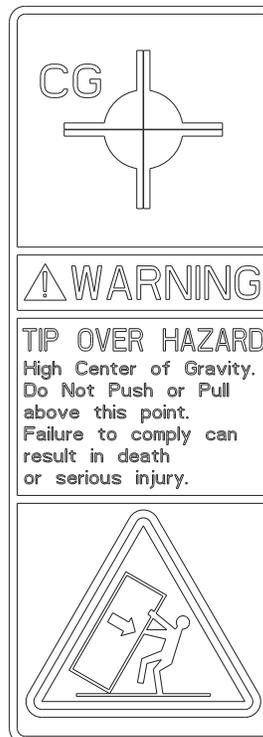

Maximum Module Weights

All lifting equipment must support these approximate maximum module weights.

Module	Cat. No.	Used with Frame Size	Approximate Maximum Weight [kg (lb)]
Power module	20-750-MI1-xnnnxnnn 20-750-MI2-xnnnxnnn 20-750-MI3-xnnnxnnn	8...15	141 (312)
	20-750-MI4-xnnnxnnn	7	113 (250)
NRS module	20-750-MN1-C770D740, 20-750-MN1-E545F505	NRS parallel configurations	134 (295)
	20-750-MN2-C770D740, 20-750-MN2-E545F505		125 (275)
	20-750-MN1-C1K4D1K3, 20-750-MN1-E980F920		204 (450)
	20-750-MN2-C1K4D1K3, 20-750-MN2-E980F920		186 (410)
LCL filter module	20-750-ML1-xnnnxnnn	8...15	322 (710)
	20-750-ML4-xnnnxnnn	7	175 (385)

Lift the Module

Follow these steps to lift a module to an upright position.


IMPORTANT The module contains wheels at the base of the assembly. Do not remove the lifting hardware until the module has been stabilized and secured properly.

1. Optionally, for easier access to the module, remove the T25 hexalobular screws that secure the sides of the shipping container, and remove the container sides.
2. Insert and secure the appropriate hardware in the designated lifting holes (as shown in the illustration for your power, LCL filter, or NRS module on page 3 or 4).




ATTENTION: To guard against equipment damage, verify that the hardware is securely connected to the correct lifting holes in the module as shown.

Power Module (Cat. No. 20-750-MI1-xnnnxnnn, 20-750-MI2-xnnnxnnn, 20-750-MI3-xnnnxnnn) and LCL Filter Module (Cat. No. 20-750-ML1-xnnnxnnn)


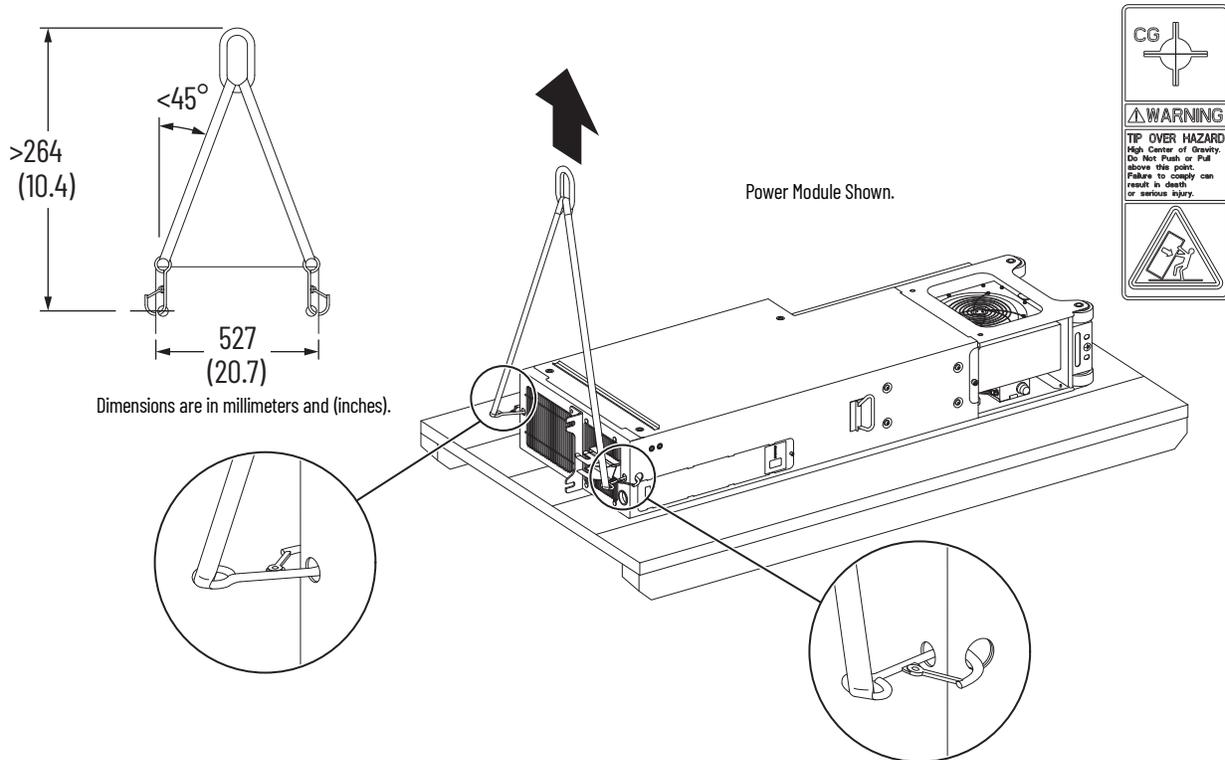


Power Module (Cat. No. 20-750-MI4-xnnnxnnn) and LCL Filter Module (Cat. No. 20-750-ML4-xnnnxnnn)

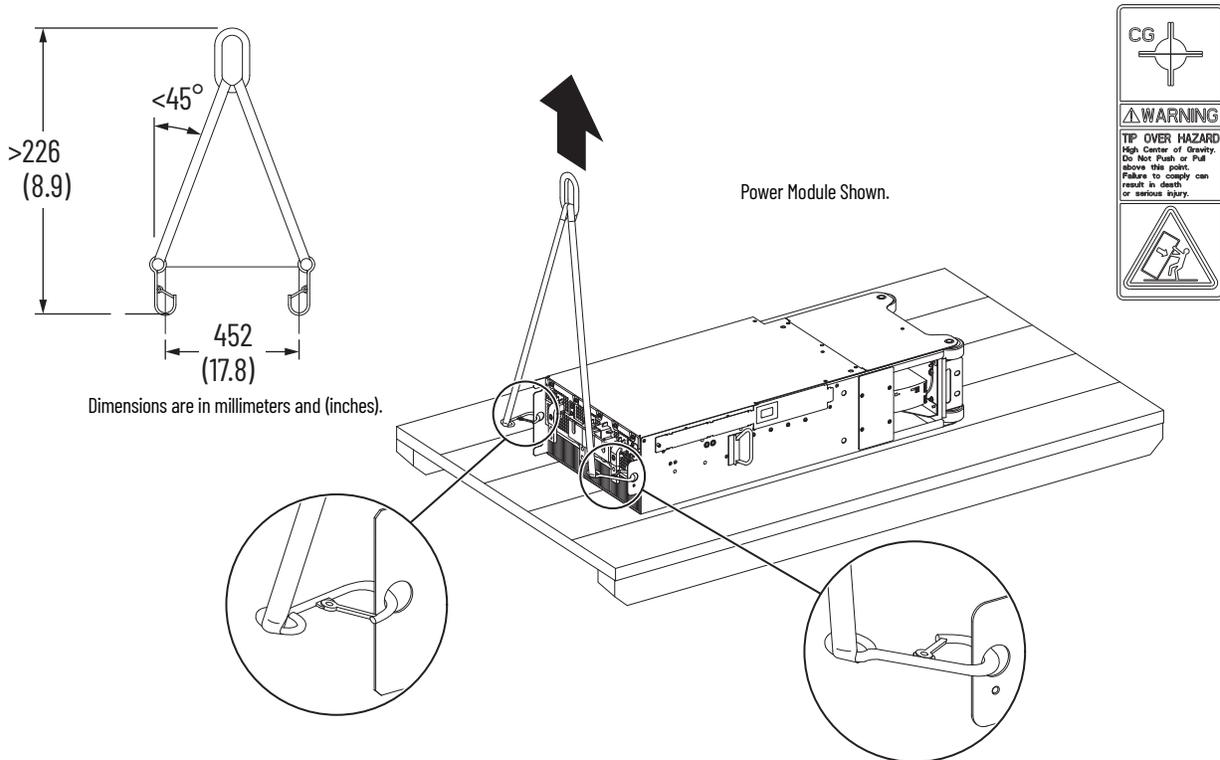

NRS Module (Cat. No. 20-750-MNn-xnnnxxxx)

IMPORTANT: To avoid damage, remove the plastic protective cover before you attach hardware to lift holes.

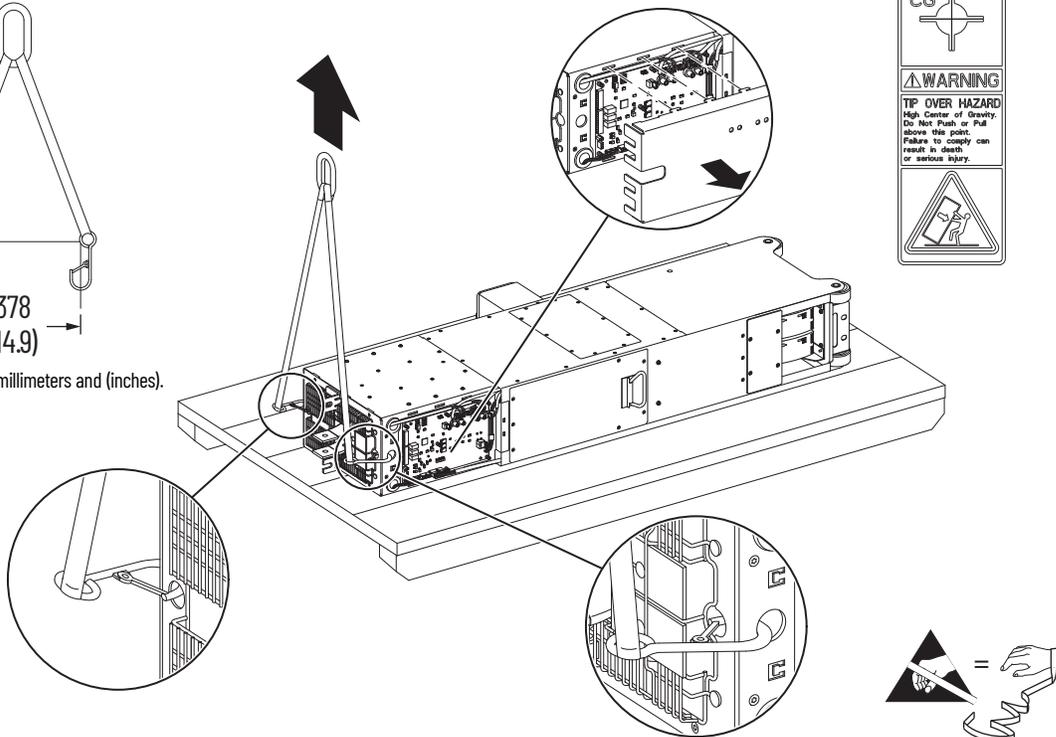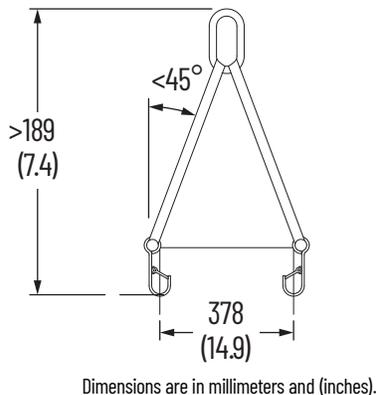

3. Slowly lift the module to an upright, vertical position.

Do not remove the hardware that is used to lift the module until the module has been secured and stabilized.



ATTENTION: The module has a high center of gravity and a tip-over hazard exists. To guard against death, serious personal injury, or equipment damage, do not subject the module to high rates of acceleration or deceleration while transporting. Do not push or pull above the points that are indicated on the module.

4. To stabilize and transport the module to the installation or storage location, use the optional module service cart or another safe method. See the PowerFlex 750-Series Service Cart and DCPC Module Lift, Installation Instructions, publication [750-IN105](#).
5. To store the module in a vertical position, install the optional module storage hardware or secure and stabilize the module by using another safe method. See the PowerFlex 755TM Power and Filter Module Storage Hardware Installation Instructions, publication [750-IN106](#).

Additional Resources

These documents contain additional information concerning related products from Rockwell Automation.

Resource	Description
PowerFlex 755TM IP00 Open Type Kits Technical Data, publication 750-TD101	Provides detailed information on: <ul style="list-style-type: none"> • Kit selection • Kit ratings and specifications • Option specifications
PowerFlex 755TM IP00 Open Type Kits Installation Instructions, publication 750-IN101	Provides instructions to install IP00 Open Type kits in user-supplied enclosures.
PowerFlex 750-Series Service Cart and DCPC Module Lift, Installation Instructions, publication 750-IN105	Provides detailed set-up and operating instructions for the module service cart and lift extension option.
PowerFlex 755TM Power and Filter Module Storage Hardware Installation Instructions, publication 750-IN106	Provides detailed installation and usage instructions for this hardware accessory.
PowerFlex 750-Series Products with TotalFORCE® Control Hardware Service Manual, publication 750-TG100	Provides detailed information on: <ul style="list-style-type: none"> • Preventive maintenance • Component testing • Hardware replacement procedures
PowerFlex 755TM Non-Regenerative Supply User Manual, publication 750-UM100	Provides detailed information on: <ul style="list-style-type: none"> • Receiving, handling, and storage • Installation steps • Setup and commissioning • Basic troubleshooting and maintenance
Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1	Provides general guidelines for installing a Rockwell Automation industrial system.
Product Certifications website, rok.auto/certifications	Provides declarations of conformity, certificates, and other certification details.

You can view or download publications at rok.auto/literature.

Notes:

Rockwell Automation Support

Use these resources to access support information.

Technical Support Center	Find help with how-to videos, FAQs, chat, user forums, and product notification updates.	rok.auto/support
Knowledgebase	Access Knowledgebase articles.	rok.auto/knowledgebase
Local Technical Support Phone Numbers	Locate the telephone number for your country.	rok.auto/phonesupport
Literature Library	Find installation instructions, manuals, brochures, and technical data publications.	rok.auto/literature
Product Compatibility and Download Center (PCDC)	Download firmware, associated files (such as AOP, EDS, and DTM), and access product release notes.	rok.auto/pcdc

Documentation Feedback

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback.

Waste Electrical and Electronic Equipment (WEEE)



At the end of life, this equipment should be collected separately from any unsorted municipal waste.

Rockwell Automation maintains current product environmental compliance information on its website at rok.auto/pec.

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback.

For technical support, visit rok.auto/support.

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752 İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    

rockwellautomation.com — expanding **human possibility**[™]

AMERICAS: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

EUROPE/MIDDLE EAST/AFRICA: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

ASIA PACIFIC: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Allen-Bradley, expanding human possibility, PowerFlex, and Rockwell Automation are trademarks of Rockwell Automation, Inc. Trademarks not belonging to Rockwell Automation are property of their respective companies.

Publication 750-IN104D-EN-P - June 2021 | Supersedes Publication 750-IN104C-EN-P-June 2020
Copyright © 2021 Rockwell Automation, Inc. All rights reserved. Printed in the U.S.A.



PN-629017