

Product Compatibility and Download Center



LISTEN.
THINK.
SOLVE.®

Important User Information

This documentation, whether, illustrative, printed, “online” or electronic (hereinafter “Documentation”) is intended for use only as a learning aid when using Rockwell Automation approved demonstration hardware, software and firmware. The Documentation should only be used as a learning tool by qualified professionals.

The variety of uses for the hardware, software and firmware (hereinafter “Products”) described in this Documentation, mandates that those responsible for the application and use of those Products must satisfy themselves that all necessary steps have been taken to ensure that each application and actual use meets all performance and safety requirements, including any applicable laws, regulations, codes and standards in addition to any applicable technical documents.

In no event will Rockwell Automation, Inc., or any of its affiliate or subsidiary companies (hereinafter “Rockwell Automation”) be responsible or liable for any indirect or consequential damages resulting from the use or application of the Products described in this Documentation. Rockwell Automation does not assume responsibility or liability for damages of any kind based on the alleged use of, or reliance on, this Documentation.

No patent liability is assumed by Rockwell Automation with respect to use of information, circuits, equipment, or software described in the Documentation.

Except as specifically agreed in writing as part of a maintenance or support contract, equipment users are responsible for:

- properly using, calibrating, operating, monitoring and maintaining all Products consistent with all Rockwell Automation or third-party provided instructions, warnings, recommendations and documentation;
- ensuring that only properly trained personnel use, operate and maintain the Products at all times;
- staying informed of all Product updates and alerts and implementing all updates and fixes; and
- all other factors affecting the Products that are outside of the direct control of Rockwell Automation.

Reproduction of the contents of the Documentation, in whole or in part, without written permission of Rockwell Automation is prohibited.

Throughout this manual we use the following notes to make you aware of safety considerations:

WARNING

Identifies information about practices or circumstances that can cause an explosion in a hazardous environment, which may lead to personal injury or death, property damage, or economic loss.

IMPORTANT

Identifies information that is critical for successful application and understanding of the product.

ATTENTION

Identifies information about practices or circumstances that can lead to personal injury or death, property damage, or economic loss. Attentions help you:

- identify a hazard
 - avoid a hazard
 - recognize the consequence
-

SHOCK HAZARD

Labels may be located on or inside the drive to alert people that dangerous voltage may be present.

BURN HAZARD

Labels may be located on or inside the drive to alert people that surfaces may be dangerous temperatures.

Product Compatibility and Download Center

Contents

- Before You Begin 4
- Exercise 1: Update ControlLogix Controller with Newer Software and Firmware 5
 - Determine Available Controller Versions 5
 - Compare Multiple Products and Versions..... 9
 - Modify a Comparison Matrix and Save the View 15
 - Export a Saved View to a Spreadsheet 17
 - Import a Spreadsheet View..... 18
- Download Firmware 20
- Exercise 2: Review and Download Serialized Software Products 23
 - Add a Software Product to a Saved View 23
 - Search for a Specific Item 26
- Exercise 3: Subscriptions and Notifications 27
 - Modify Subscriptions 29
 - View Notifications 30
- Exercise 4: Other Views to Help Determine Compatibility 31
 - Determine What Operating Systems Are Supported by a Specific Software Product..... 31
 - Find a Specific Feature and Determine Whether that Feature Is Supported by a Specific Product..... 33
 - Determine Whether You Can Replace an Older Version with a Newer Version 36
 - Display a Category to Determine What Products Support EtherNet/IP Networks 38
- Work with Standard Views 40

Before You Begin

The Product Compatibility and Downloads Center can help you find product-related downloads including firmware, release notes, associated software, drivers, tools and utilities. Use the Product Compatibility and Download Center to do the following:


- Determine how different products interact.
- Compare features and capabilities between different series of products and associated firmware versions.

About this Lab


This lab introduces the Product Compatibility and Download Center and shows different features of the site.

This lab takes approximately 45 minutes to complete.

From <http://ab.rockwellautomation.com/>, click on Product Compatibility and Download Center in the left navigation menu.

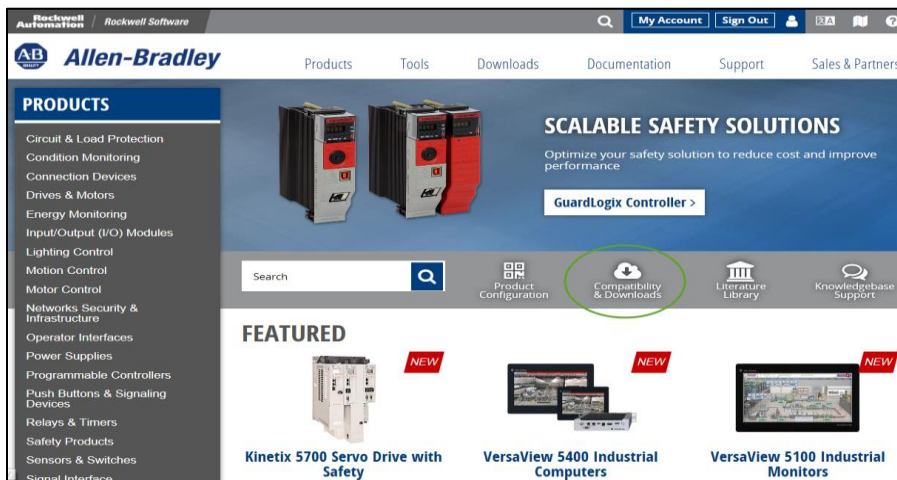

The screenshot shows the Allen-Bradley website interface. At the top, there is a navigation bar with 'My Account' and 'Sign Out' links. Below this is a main navigation menu with 'Products', 'Tools', 'Downloads', 'Documentation', 'Support', and 'Sales & Partners'. A 'PRODUCTS' sidebar is on the left, listing various categories like 'Circuit & Load Protection', 'Condition Monitoring', etc. The main content area features a 'SCALABLE SAFETY SOLUTIONS' banner with 'GuardLogix Controller' and a 'FEATURED' section with three product tiles: 'Kinetix 5700 Servo Drive with Safety', 'VersaView 5400 Industrial Computers', and 'VersaView 5100 Industrial Monitors'. A green circle highlights the 'Compatibility & Downloads' icon in the top navigation area.

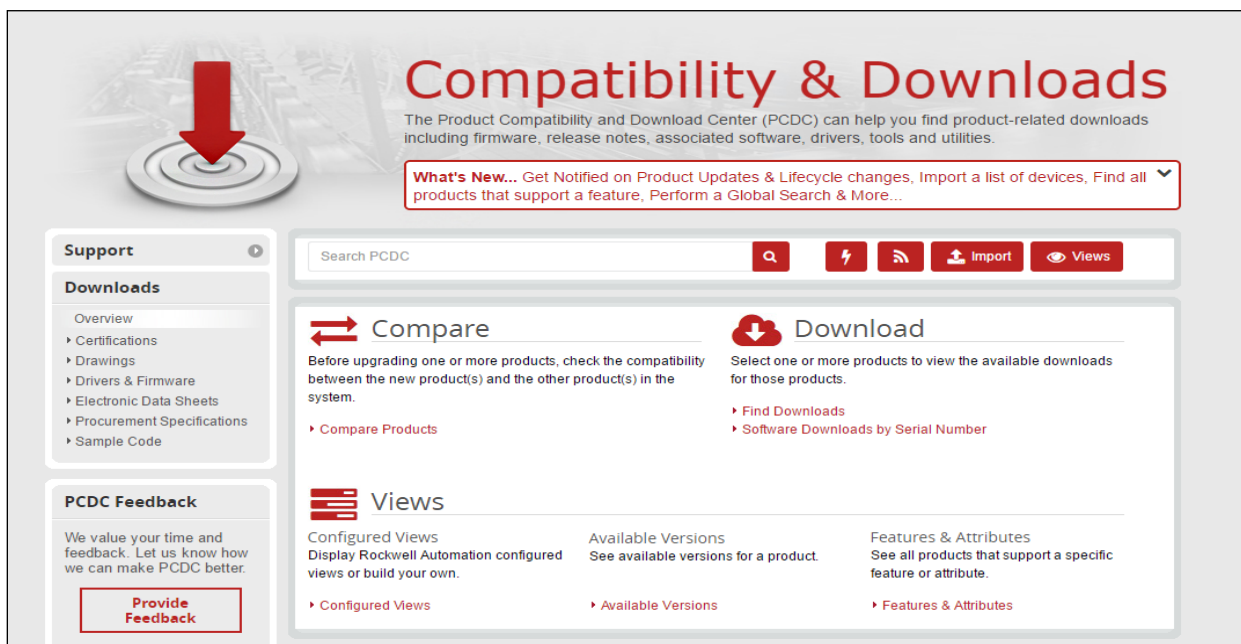

The screenshot shows the 'Compatibility & Downloads' center interface. It features a large red arrow pointing down to a target icon. The main heading is 'Compatibility & Downloads' in red. Below the heading, a text block explains the PCDC's purpose. A 'What's New...' section offers notifications for product updates and lifecycle changes. A search bar labeled 'Search PCDC' is present, along with icons for lightning bolt, RSS, import, and views. The interface is divided into several sections: 'Support' with a 'Downloads' list (Overview, Certifications, Drawings, Drivers & Firmware, Electronic Data Sheets, Procurement Specifications, Sample Code); 'Compare' (Before upgrading, check compatibility between new and existing products); 'Download' (Select one or more products to view available downloads); and 'Views' (Configured Views, Available Versions, Features & Attributes). A 'Provide Feedback' button is located in the bottom left corner.

Exercise 1: Update ControlLogix Controller with Newer Software and Firmware

Assume you have ControlLogix 1756-L73 Series B, Version 20 controllers. You want to upgrade to a newer revision of the controller firmware. Find the most current firmware revision and the compatible Studio 5000 Logix Designer version.

In this exercise, you will:

- Determine available controller versions
- Compare multiple products and versions
- Modify a comparison matrix and save the view
- Export a saved view to a spreadsheet
- Download firmware

Determine Available Controller Versions

Follow these steps to see the versions that are available for a controller.

1. Click Available Versions from the center of the main page.

You see the following on the screen.

Compatibility & Downloads

The Product Compatibility and Download Center (PCDC) can help you find product-related downloads including firmware, release notes, associated software, drivers, tools and utilities.

What's New... Get Notified on Product Updates & Lifecycle changes, Import a list of devices, Find all products that support a feature, Perform a Global Search & More...

Search PCDC


Compare
Before upgrading one or more products, check the compatibility between the new product(s) and the other product(s) in the system.
▶ Compare Products

Download
Select one or more products to view the available downloads for those products.
▶ Find Downloads
▶ Software Downloads by Serial Number

Views

| | | |
|--|--|---|
| Configured Views Display Rockwell Automation configured views or build your own. ▶ Configured Views | Available Versions See available versions for a product. ▶ Available Versions | Features & Attributes See all products that support a specific feature or attribute. ▶ Features & Attributes |
|--|--|---|


2. Click Select a Product.

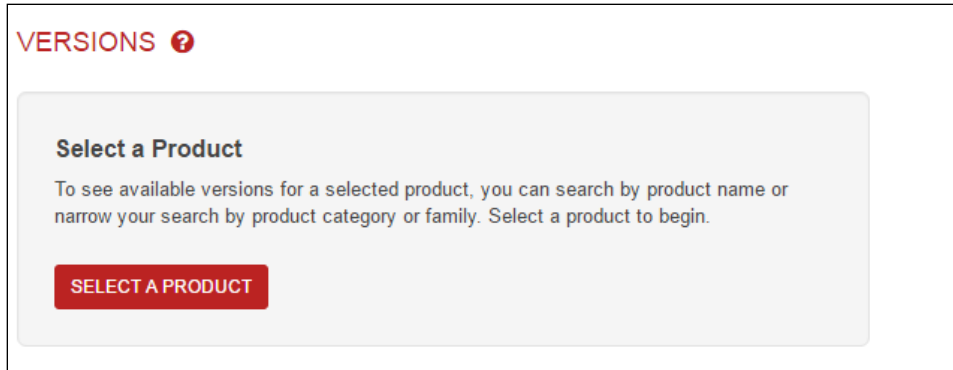

3. In the Search field, type 1756-L73.

You can enter partial text here too, such as 1756 or L73.

As you type, a list of products matching the letters you type appears.

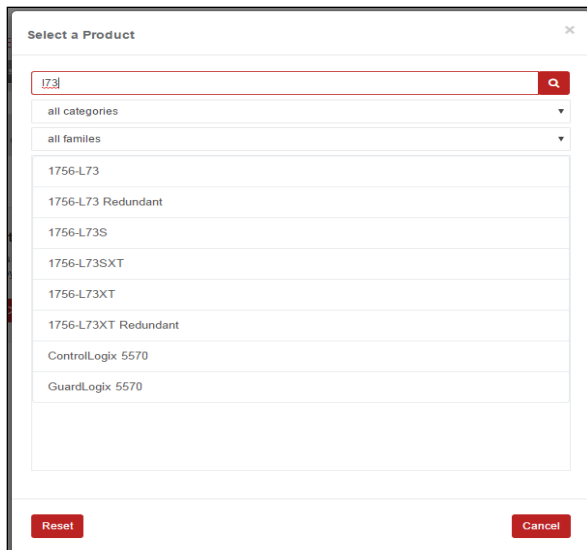

4. Click 1756-L73 and select Series B.


The available versions for the 1756-L73 Series B controller appear, along with compatibility information about the versions.

The screenshot shows a table of versions for the "1756-L73 (series B)" product. The table has columns for "Version", "Downloads", and "Information". The versions listed are 30.013, 30.012, 30.011, 29.011, 28.012, 28.011, 27.011, and 26.013. Below the table are sections for "Product Features" including "Firmware Migration", "Anomaly", "Functional Changes", "System Requirements", and "Application Notes". A note at the bottom states: "A blank or empty cell indicates that there are no known issues or dependencies."

| Version | 30.013 | 30.012 | 30.011 | 29.011 | 28.012 | 28.011 | 27.011 | 26.013 |
|-------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Downloads | | | | | | | | |
| Information | | | | | | | | |


Notice that 30.013 is the newest version available.

5. Click .

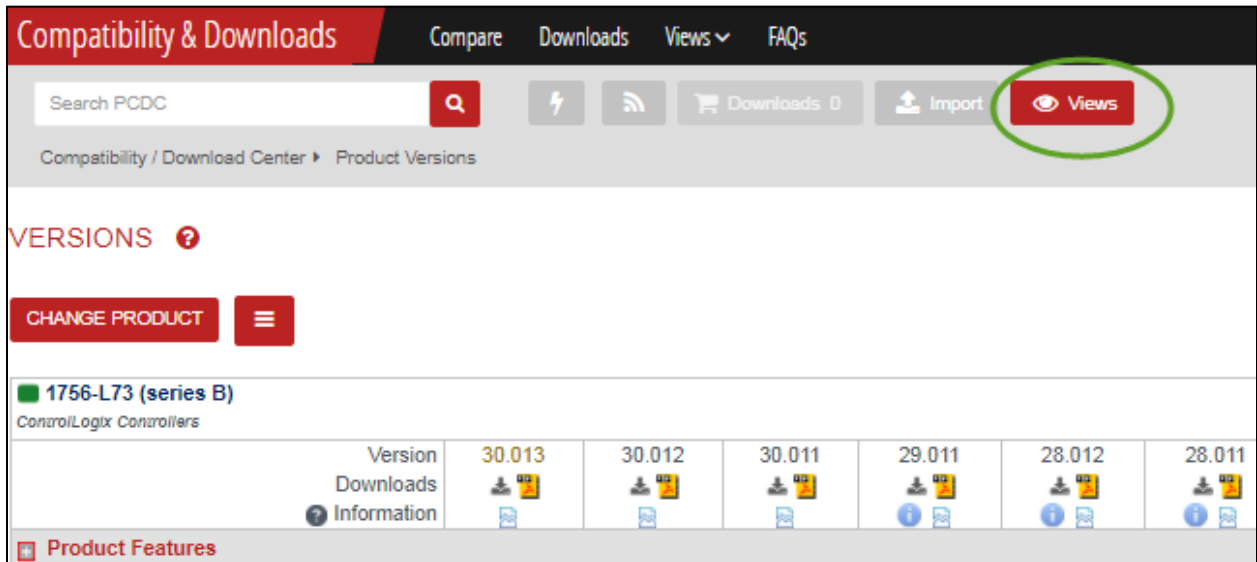

The screenshot shows the 'Compatibility & Downloads' page. The top navigation bar includes 'Compare', 'Downloads', 'Views', and 'FAQs'. A search bar is present with the text 'Search PCDC'. Below the search bar, there are icons for 'Downloads 0' and 'Import'. The 'Views' button is circled in green. The main content area shows 'VERSIONS' with a help icon, a 'CHANGE PRODUCT' button, and a table for '1756-L73 (series B) ControlLogix Controllers'. The table has columns for versions 30.013, 30.012, 30.011, 29.011, 28.012, and 28.011, each with download and information icons. A 'Product Features' button is at the bottom left.

6. On the Standard Views tab, scroll down and select Rockwell Software – Latest Versions.

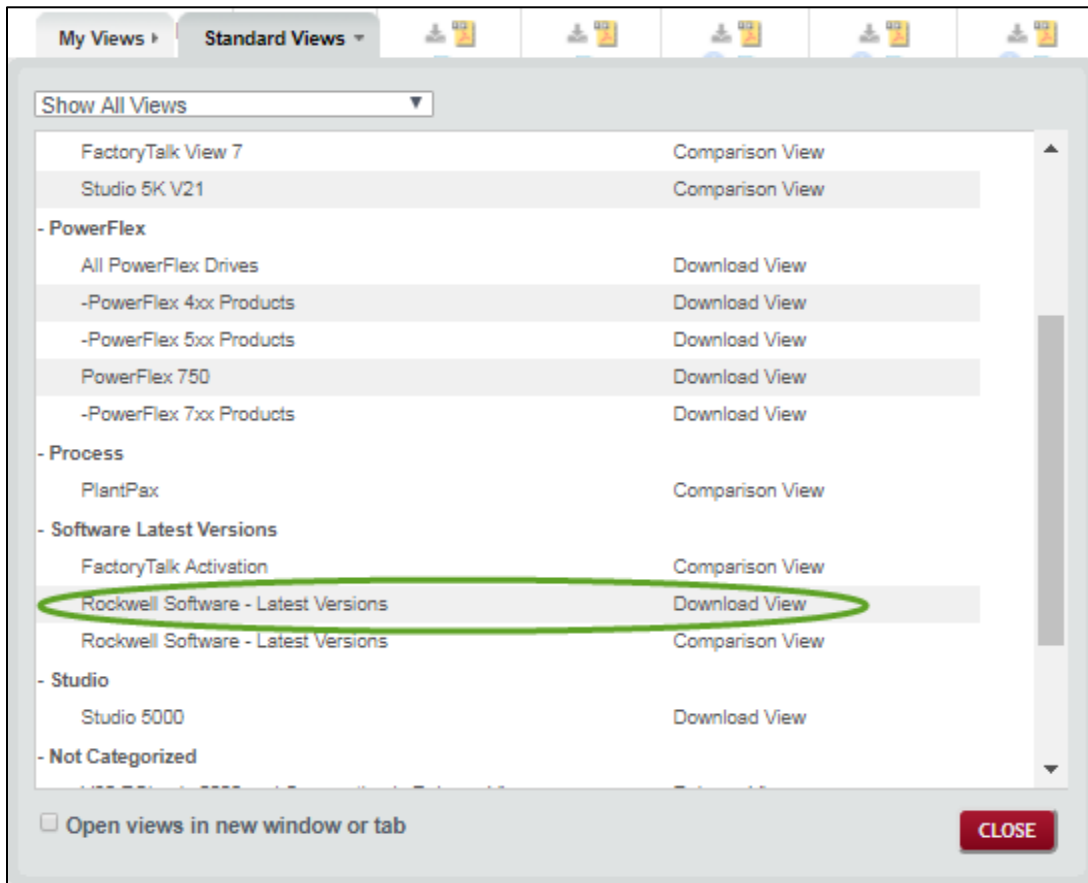

The screenshot shows the 'Standard Views' dropdown menu. The 'Standard Views' tab is selected. A 'Show All Views' dropdown is at the top. The menu lists various views categorized by product line: FactoryTalk, PowerFlex, Process, Software Latest Versions, Studio, and Not Categorized. The 'Rockwell Software - Latest Versions' option is circled in green. A 'CLOSE' button is at the bottom right. There is also a checkbox for 'Open views in new window or tab'.

7. In the View, choose Compare.

The screenshot shows the Rockwell Automation website's 'Compatibility & Downloads' section. The 'COMPARE' button is highlighted with a green circle. Below the navigation bar, there is a search bar and several utility icons. The main content area features a table of software products with columns for 'SELECTIONS' and 'Downloads'. The 'COMPARE' button is located above the table, and the 'Downloads' column contains download icons and options like 'Select Files' and 'Firmware Only'.

| SELECTIONS | Downloads |
|--|--|
| Arena 15.10.00 <i>(8502-Ax) Arena simulation software helps you analyze what-if business ideas, rules, and strategies before implementation.</i> | |
| Condition Monitoring XM Modules R8 <i>XM Serial Configuration Utility</i> | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only |
| DriveExplorer 6.04.99 <i>(8306-4E...) Provides online configuration of PowerFlex 4-Class, 7-Class and SCANport drives.</i> | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only |
| DriveTools SP 5.06.00 <i>(8303-4...) Configuration software suite (DriveExecutive and DriveObserver) for PowerFlex 4-Class, 7-Class and SCANport drives</i> | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only |
| Emonitor 4.00.00 <i>(8308-CMS) SW to collect, database, trend, analyze & manage vibration and other data for a condition based maintenance program</i> | |
| FactoryTalk AssetCentre 8.00.00 <i>(8515-ASTx) Provides you with a set of asset focused tools to securely/centrally manage your facility and process automation.</i> | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only |
| FactoryTalk Batch 13.00.00 <i>(8358-Bx) Provides efficient, predictable batch processing, consistency between batches, and generation of event info.</i> | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only |


Compare Multiple Products and Versions

Follow these steps to compare multiple products and multiple versions to see supported feature sets.

1. Navigate to Selections via Multi Product Selector breadcrumb

| Version Downloads | Arena | Condition Monitoring XM Modules | DriveExplorer | DriveTools SP | Emonitor | FactoryTalk AssetCentre | FactoryTalk Batch |
|------------------------------------|-------|---------------------------------|---------------|---------------|----------|-------------------------|-------------------|
| 15.10.00 | | R8 | 6.04.99 | 5.06.00 | 4.00.00 | 8.00.00 | 13.00.00 |
| Compatibility | | | | | | | |
| Arena 15.10.00 | | | | | | | |
| Condition Monitoring XM Modules R8 | | ● | | | | | |
| DriveExplorer 6.04.99 | | | ● | | | | |
| DriveTools SP 5.06.00 | | | | ● | | | |
| Emonitor 4.00.00 | | | | | ● | | |
| FactoryTalk AssetCentre 8.00.00 | | | | | | ● | |
| FactoryTalk Batch 13.00.00 | | | | | | | ● |

2. In the Product Search field, select these products one at a time to enter them in the Selections window:

If the product list is already populated with products, click  before entering the following products.

- 1756-L73 Series B controller, version 24.012
- 1756-L73 Series B controller, version 30.013
- Studio 5000 Logix Designer, version 24.01.00
- Studio 5000 Logix Designer, version 30.01.01

| logix design | All Categories | All Families |
|-----------------------------|---|--------------|
| Add-On Profiles | Add-On Profiles for RSLogix 5000/Studio 5000 Logix Designer (AOP, Add-On Profiles, Logix Designer, Bundle, Endress+Hauser) (Accessories/Utilities) | |
| Logix Designer Compare Tool | Logix Designer Compare and Merge Tool (Programmable Controllers/ControlLogix) | |
| Studio 5000 Logix Designer | (9324-RLDx) Studio 5000 programming software. All you need for discrete, process, batch, motion, safety etc. (Software/Software) | |
| Studio 5000 Tools | Free downloads include: Task Monitor, Logix Designer Compare, Clock Update, Clock Sync Service, Translate PLC5-SLC500, & others (Programmable Controllers/ControlLogix) | |

| SELECTIONS |
|-------------------------------------|
| 1756-L71 B 24.012 |
| 1756-L73 B 30.013 |
| Studio 5000 Logix Designer 24.01.00 |
| Studio 5000 Logix Designer 30.01.01 |

3. Click Compare.

The comparison matrix appears.

COMPARE SELECTIONS ?

SELECTIONS DOWNLOADS

| | 1756-L73 | 1756-L73 | Studio 5000 Logix Designer | Studio 5000 Logix Designer |
|--|----------|----------|----------------------------|----------------------------|
| Series | series B | series B | | |
| Version | 24.012 | 30.013 | 24.01.00 | 30.01.01 |
| Downloads | | | | |
| Information | | | | |
| Compatibility | | | | |
| 1756-L73 (series B) 24.012 | | | ✓ | ✗ |
| 1756-L73 (series B) 30.013 | | | ✗ | ✓ |
| Studio 5000 Logix Designer 24.01.00 | ✓ | ✗ | | ✓ |
| Studio 5000 Logix Designer 30.01.01 | ✗ | ✓ | ✓ | |
| Other Products - Compatibility | | | | |
| Rockwell Services | | | | |
| Operating Systems | | | | |
| Antivirus Software | | | | |
| EXPAND ALL Release Notes <input type="checkbox"/> Show all release notes from earlier versions | | | | |
| Product Features | | | | |

4. Click on the Lifecycle Status icon for information about the product.

1756-L73

Series B

24.012

Lifecycle status information appears.

1756-L73 ✕

| Product ID | Product Description | Lifecycle Status | Discontinued Date |
|------------|------------------------------|------------------|-------------------|
| 1756-L73 | CONTROLLOGIX 8 MB CONTROLLER | Active | |

5. Click the X to close.

6. Scroll down and expand Product Features and expand Alarms and Events.

| EXPAND ALL Release Notes <input type="checkbox"/> Show all release notes from earlier versions | | | | |
|--|----------------------|----------------------|--|--|
| Product Features | 1756-L73 B 24.012 | 1756-L73 B 30.013 | Studio 5000 Logix Designer 24.01.00 | Studio 5000 Logix Designer 30.01.01 |
| Alarms and Events | | | | |
| Alarm Shelving support for Logix device-based Alarms ⓘ | ✓ | ✓ | ⓘ | ⓘ |
| Full ISA 18.2 Alarm State Standard Adoption ⓘ | ✓ | ✓ | ⓘ | ⓘ |

The compare matrix displays data specific to the versions in the matrix.

7. Click on Full ISA 18.2 Alarm State Standard Adoption information icon (ⓘ).

A window appears with a description of that feature.

The screenshot shows the 'COMPARE SELECTIONS' interface. At the top, there are buttons for 'SELECTIONS', 'DOWNLOADS', and a menu icon. Below this is a comparison matrix with columns for '1756-L73 series B 24.012', '1756-L73 series B 30.013', 'Studio 5000 Logix Designer 24.01.00', and 'Studio 5000 Logix Designer 30.01.01'. A pop-up window is open over the matrix, displaying the following text:

Full support of ISA 18.2 alarming support model
 System Feature First Identified as of Studio 5000 Logix Designer Version 24.00

The Logix Designer application now supports Shelving, Suppressed by Design, and Out of Service functions with the ALMA and ALMD instructions. These features allow for an easy adoption of the ISA 18.2 alarming model.

A red 'CLOSE' button is located at the bottom right of the pop-up window. A green arrow points from the information icon (ⓘ) in the matrix to the pop-up window.

In the product matrix display, click on any attribute in the left column that has the information icon (ⓘ) to read about that attribute. These attributes also appear in the online, generated release notes that you will create later in this exercise.


8. Click Close.

- Click Show all release notes from earlier versions.

| EXPAND ALL Release Notes | | <input checked="" type="checkbox"/> Show all release notes from earlier versions | |
|--------------------------|-------------------------|--|-------------------------|
| Product Features | 1756-L73 B 24.012 | 1756-L73 B 30.013 | 1756-L73 B 30.011 |
| General | | | |

The compare matrix now displays the attributes that first appeared in earlier versions but that are still supported in the selected versions.

| EXPAND ALL Release Notes | | <input checked="" type="checkbox"/> Show all release notes from earlier versions | | | |
|--|-------------------------|--|--|--|--|
| Product Features | 1756-L73 B 24.012 | 1756-L73 B 30.013 | Studio 5000 Logix Designer 24.01.00 | Studio 5000 Logix Designer 30.01.01 | |
| General | | | | | |
| Add On Instructions | | | | | |
| Alarms and Events | | | | | |
| Alarm Shelving support for Logix device-based Alarms | ✓ | ✓ | ! | ! | |
| ALMA and ALMD Instructions | ✓ | ✓ | ✓ | ✓ | |
| FactoryTalk Alarms and Events Features | | | ✓ | ✓ | |
| Full ISA 18.2 Alarm State Standard Adoption | ✓ | ✓ | ! | ! | |

- Click the Download icon () in the column heading for the 1756-L73 controller, version 24.012.

| COMPARE SELECTIONS ? | | | | |
|--|---|--|---|---|
| SELECTIONS | DOWNLOADS | | | |
| 1756-L73 Series series B Version 24.012 Downloads  | 1756-L73 series B 30.013 Downloads  | Studio 5000 Logix Designer 24.01.00 Downloads  | Studio 5000 Logix Designer 30.01.01 Downloads  | |
| Compatibility | | | | |
| 1756-L73 (series B) 24.012 | | | ✓ | ✗ |

The Available Downloads window appears with your options.

1756-L73 (SERIES B) 24.012 Downloads 0

Release Notes

-  Custom Release Note

EDS Files

- EDS files for 1756-L73 B v24.012


Firmware

- Firmware for 1756-L71, -L72(EROM), -L73, -L74, -L75 V24.012

Close

11. Click Custom Release Notes.

The Custom Release Notes window appears with your options.

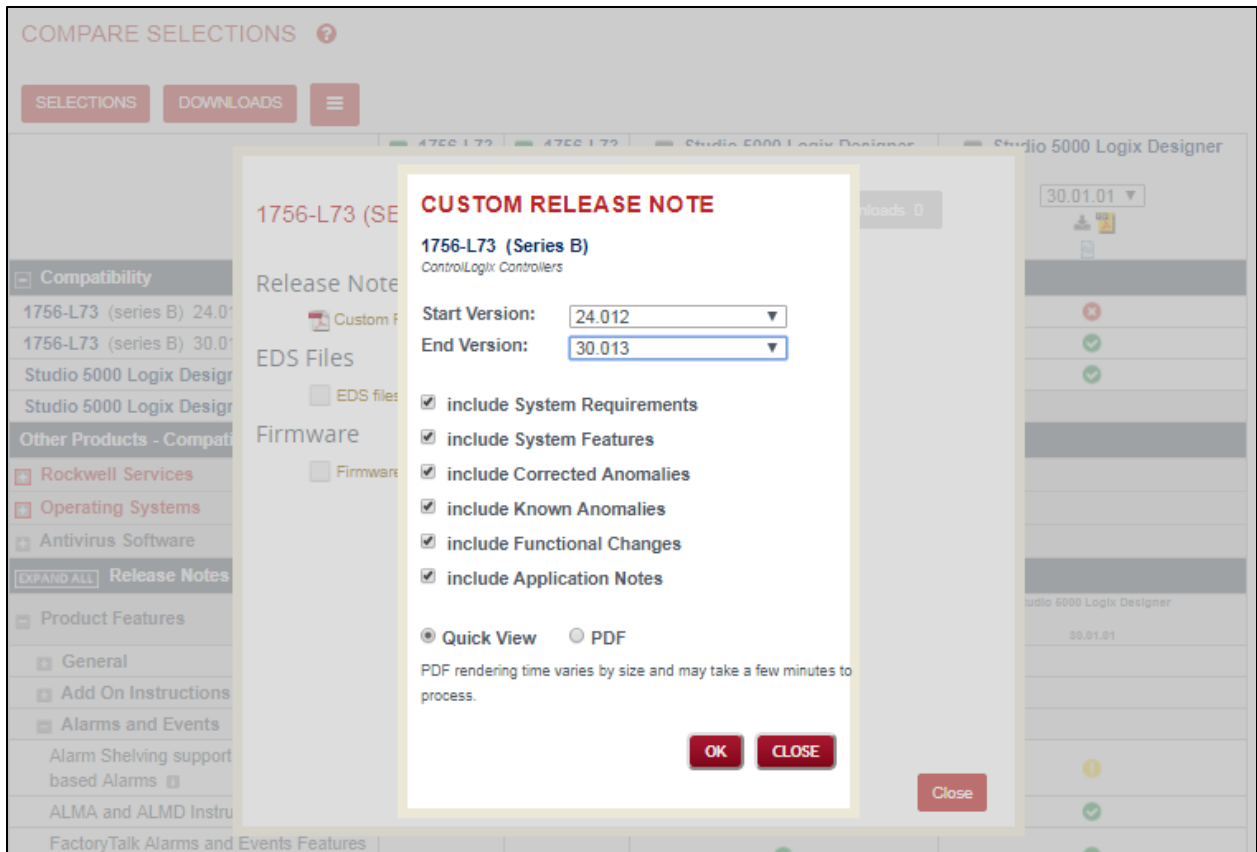

12. Select 30.013 as the Ending Version and click OK.

The multiple-version release notes version 24.012 through 30.013 appear.

Release Notes
ControlLogix Controllers
Version 24.012 (released 1/2015) - 30.013 (released 11/2017)
Catalog Number 1756-L73 (series B)
These release notes describe version information for ControlLogix Controllers, version 24.012 (released 1/2015) - 30.013 (released 11/2017).

System Requirements
This release has the following system requirements.

Compatible Software for Controller Firmware Revision 29
System Requirements as of Revision 29.011
Catalog Numbers:

- GuardLogix® 5570
- ControlLogix® 5570
- ControlLogix 5580
- Compact GuardLogix 5370
- CompactLogix™ 5370
- CompactLogix 5380

This table identifies the minimum software versions that are compatible with firmware revision 29.011.

| Software | Version |
|-----------------------------|----------|
| Studio 5000 Logix Designer® | 29 |
| RSLink® Classic | 3.81 |
| ControlFLASH™ | 13.00.00 |

System Features
This release includes the following system features.

HMI Button Control Instructions
System Feature First identified as of Firmware Revision 27.011
Catalog Numbers:

- 1756 ControlLogix® L7
- 1756 GuardLogix® L7S
- 5370 CompactLogix™ L1
- 5370 CompactLogix L2
- 5370 CompactLogix L3


13. Scroll through the release notes to see System Features, Corrected Anomalies, Known Anomalies, and Functional Changes.

14. Click the X to close release note window.

Modify a Comparison Matrix and Save the View

Follow these steps to add to the product comparison matrix and to save the matrix for later use.


1. Return to the Compare Selections window and click Selections.

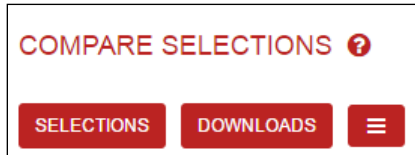


2. Add 1756-EN2TR Signed Firmware, Seres C, Version 10.010 to the Selections window.



3. Select the 1756-EN2TR in the Selections window and use the up arrow to move it to the top of the list.

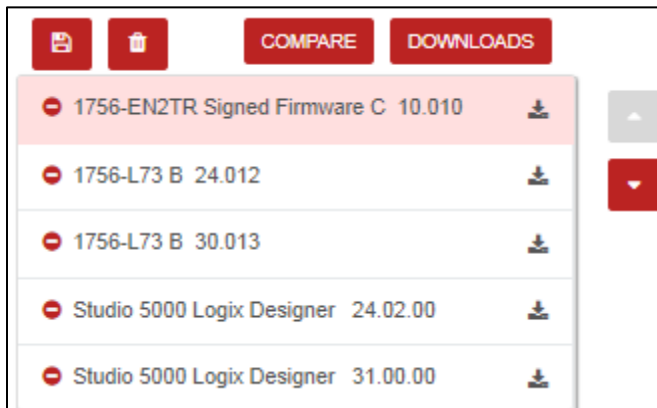

You can also download firmware from the Selection window if you click on the download icon ().

- Click Compare.


The 1756-EN2TR module is added to the product matrix.

COMPARE SELECTIONS ?


SELECTIONS DOWNLOADS ☰

| | 1756-EN2TR Signed Firmware | 1756-L73 | 1756-L73 | Studio 5000 Logix Designer | Studio 5000 Logix Designer |
|--|----------------------------|----------|----------|----------------------------|----------------------------|
| Series | series C | series B | series B | | |
| Version | 10.010 | 24.012 | 30.013 | 24.02.00 | 31.00.00 |
| Downloads | 📄 📄 | 📄 📄 | 📄 📄 | 📄 📄 | 📄 📄 |
| Information | 🔍 📄 | 🔍 📄 | 🔍 📄 | 🔍 📄 | 🔍 📄 |
| Compatibility | | | | | |
| 1756-EN2TR Signed Firmware (series C) 10.010 | | ● | ● | ✓ | ✓ |
| 1756-L73 (series B) 24.012 | ● | | ● | ✓ | ✗ |
| 1756-L73 (series B) 30.013 | ● | ● | | ✗ | ✗ |
| Studio 5000 Logix Designer 24.02.00 | ✓ | ✓ | ✗ | | ✓ |
| Studio 5000 Logix Designer 31.00.00 | ✓ | ✗ | ✗ | ✓ | |

- Select Save from the menu (☰) to save the above the compatibility matrix to a view.

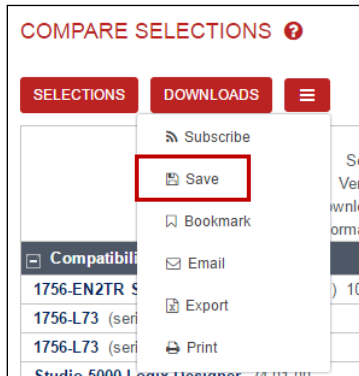

You see a prompt to sign in.

- Either use your Rockwell Automation credential to log in or create an account.
- Click Save again and enter a name for the view, as follows:
- Click  and then click the My Views tab to select the view you just saved.

The window identifies the view.

MY SAVED VIEW ?


SELECTIONS DOWNLOADS ☰


| | 1756-EN2TR Signed Firmware | 1756-L73 | 1756-L73 | Studio 5000 Logix Designer | Studio 5000 Logix Designer |
|--|----------------------------|----------|----------|----------------------------|----------------------------|
| Series | series C | series B | series B | | |
| Version | 10.010 | 24.012 | 30.013 | 24.02.00 | 31.00.00 |
| Downloads | 📄 📄 | 📄 📄 | 📄 📄 | 📄 📄 | 📄 📄 |
| Information | 🔍 📄 | 🔍 📄 | 🔍 📄 | 🔍 📄 | 🔍 📄 |
| Compatibility | | | | | |
| 1756-EN2TR Signed Firmware (series C) 10.010 | | ● | ● | ✓ | ✓ |
| 1756-L73 (series B) 24.012 | ● | | ● | ✓ | ✗ |
| 1756-L73 (series B) 30.013 | ● | ● | | ✗ | ✗ |
| Studio 5000 Logix Designer 24.02.00 | ✓ | ✓ | ✗ | | ✓ |
| Studio 5000 Logix Designer 31.00.00 | ✓ | ✗ | ✗ | ✓ | |

Other Products - Compatibility


Export a Saved View to a Spreadsheet

Follow these steps to save a view to a spreadsheet.

1. Make sure your saved view is open.
2. Select Export from the menu () to export the above the compatibility matrix to a spreadsheet.

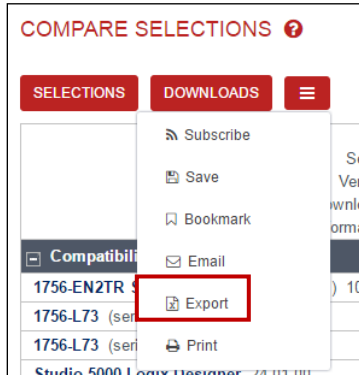

3. Open the spreadsheet. The file will display at the bottom of some browsers.

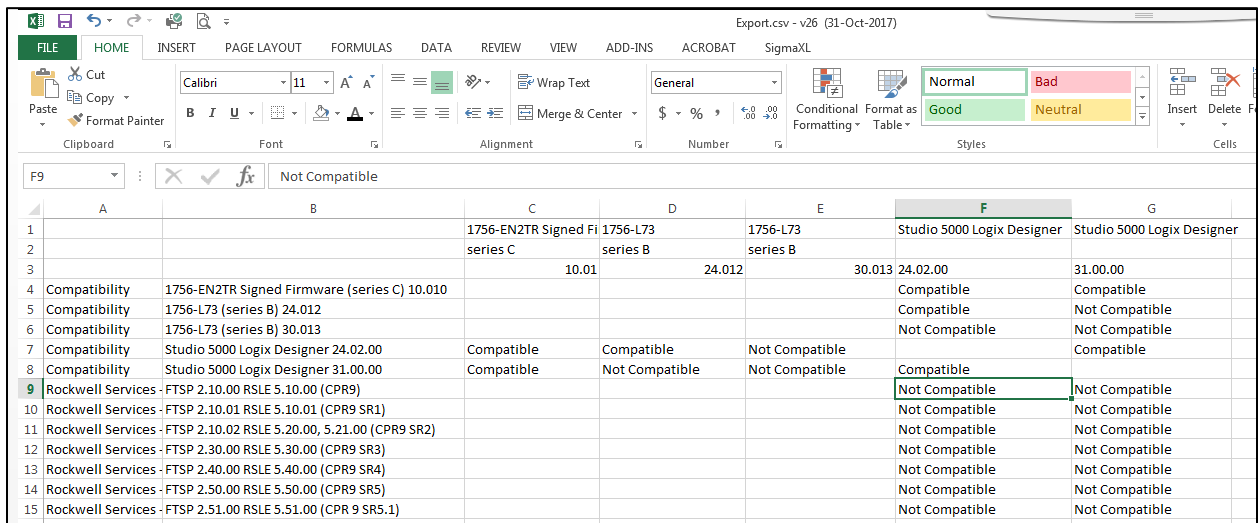

The screenshot shows a Microsoft Excel spreadsheet titled "Export.csv - v26 (31-Oct-2017)". The spreadsheet contains a compatibility matrix with columns A through G. The data is as follows:

| | A | B | C | D | E | F | G |
|----|---|--|----------------------|----------------|----------------|----------------------------|----------------------------|
| 1 | | | 1756-EN2TR Signed Fi | 1756-L73 | 1756-L73 | Studio 5000 Logix Designer | Studio 5000 Logix Designer |
| 2 | | | series C | series B | series B | | |
| 3 | | | 10.01 | 24.012 | 30.013 | 24.02.00 | 31.00.00 |
| 4 | Compatibility | 1756-EN2TR Signed Firmware (series C) 10.010 | | | | Compatible | Compatible |
| 5 | Compatibility | 1756-L73 (series B) 24.012 | | | | Compatible | Not Compatible |
| 6 | Compatibility | 1756-L73 (series B) 30.013 | | | | Not Compatible | Not Compatible |
| 7 | Compatibility | Studio 5000 Logix Designer 24.02.00 | Compatible | Compatible | Not Compatible | | Compatible |
| 8 | Compatibility | Studio 5000 Logix Designer 31.00.00 | Compatible | Not Compatible | Not Compatible | Compatible | |
| 9 | Rockwell Services - FTSP 2.10.00 RSLE 5.10.00 (CPR9) | | | | | Not Compatible | Not Compatible |
| 10 | Rockwell Services - FTSP 2.10.01 RSLE 5.10.01 (CPR9 SR1) | | | | | Not Compatible | Not Compatible |
| 11 | Rockwell Services - FTSP 2.10.02 RSLE 5.20.00, 5.21.00 (CPR9 SR2) | | | | | Not Compatible | Not Compatible |
| 12 | Rockwell Services - FTSP 2.30.00 RSLE 5.30.00 (CPR9 SR3) | | | | | Not Compatible | Not Compatible |
| 13 | Rockwell Services - FTSP 2.40.00 RSLE 5.40.00 (CPR9 SR4) | | | | | Not Compatible | Not Compatible |
| 14 | Rockwell Services - FTSP 2.50.00 RSLE 5.50.00 (CPR9 SR5) | | | | | Not Compatible | Not Compatible |
| 15 | Rockwell Services - FTSP 2.51.00 RSLE 5.51.00 (CPR 9 SR5.1) | | | | | Not Compatible | Not Compatible |

You can reformat the spreadsheet to be more readable.



4. Close the spreadsheet.


Import a Spreadsheet View

You can import either of the following files types to display in PCDC:

- .CSV file, such as a bill of materials from Integrated Architecture Builder Software
- .RAAI file from FactoryTalk AssetCentre software

Follow these steps to import a view.

1. Click .
2. Click on  and read the instructions about the supported file types.

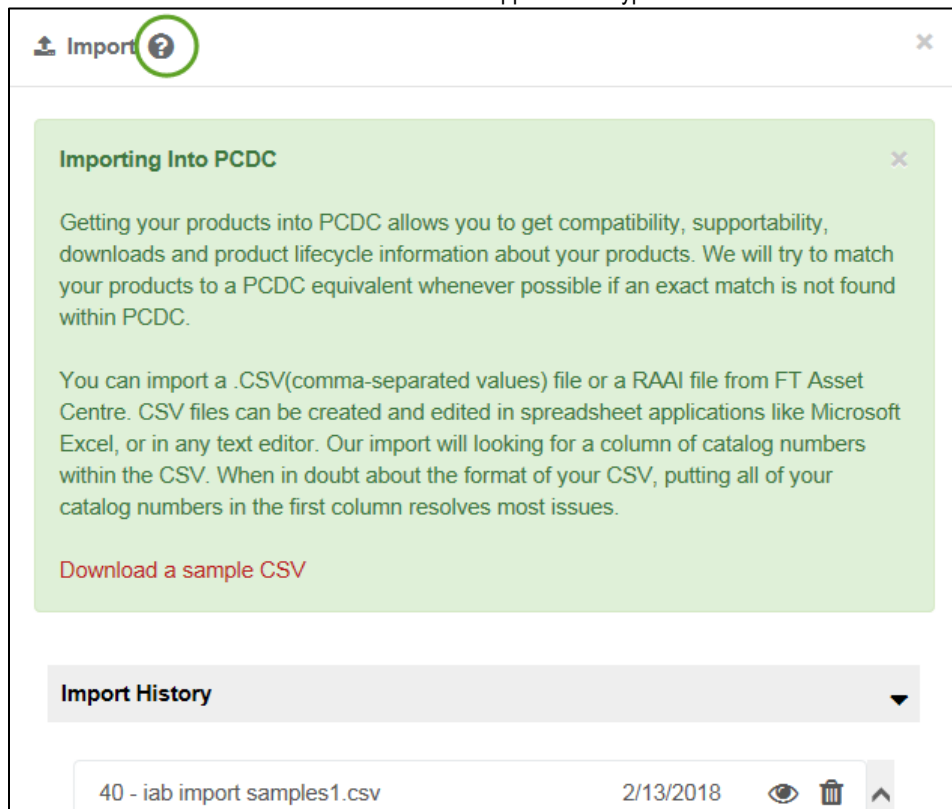




3. Click .

4. Select the file to import and click Open.


Note: Save Download a sample CSV to your desktop and import the sample file named “ pcdcimportsample.csv”

The import results appear.

 **Import**  


pcdcimportsample.csv 24 products imported

| | |
|---------------------------------|---------------------------|
| 18 products | view > |
| 5 products close matches | 0 of 5 Resolved > |
| 1 products not found | view > |

Compatibility and Downloads 

16 products found (product mappings might have occurred)

[VIEW COMPATIBILITY](#) [VIEW DOWNLOADS](#)

Product Lifecycle Status 


18 products found

[VIEW LIFECYCLE STATUS](#)

[New Import](#) [Saved Imports](#) [Close](#)


Download Firmware

Follow these steps to download one version of controller firmware.

1. Return to the compare matrix of your saved view.
2. Click the Download icon () for the 1756-L73 controller, version 24.012.

The Available Downloads window appears with your options.

3. Click the firmware option.

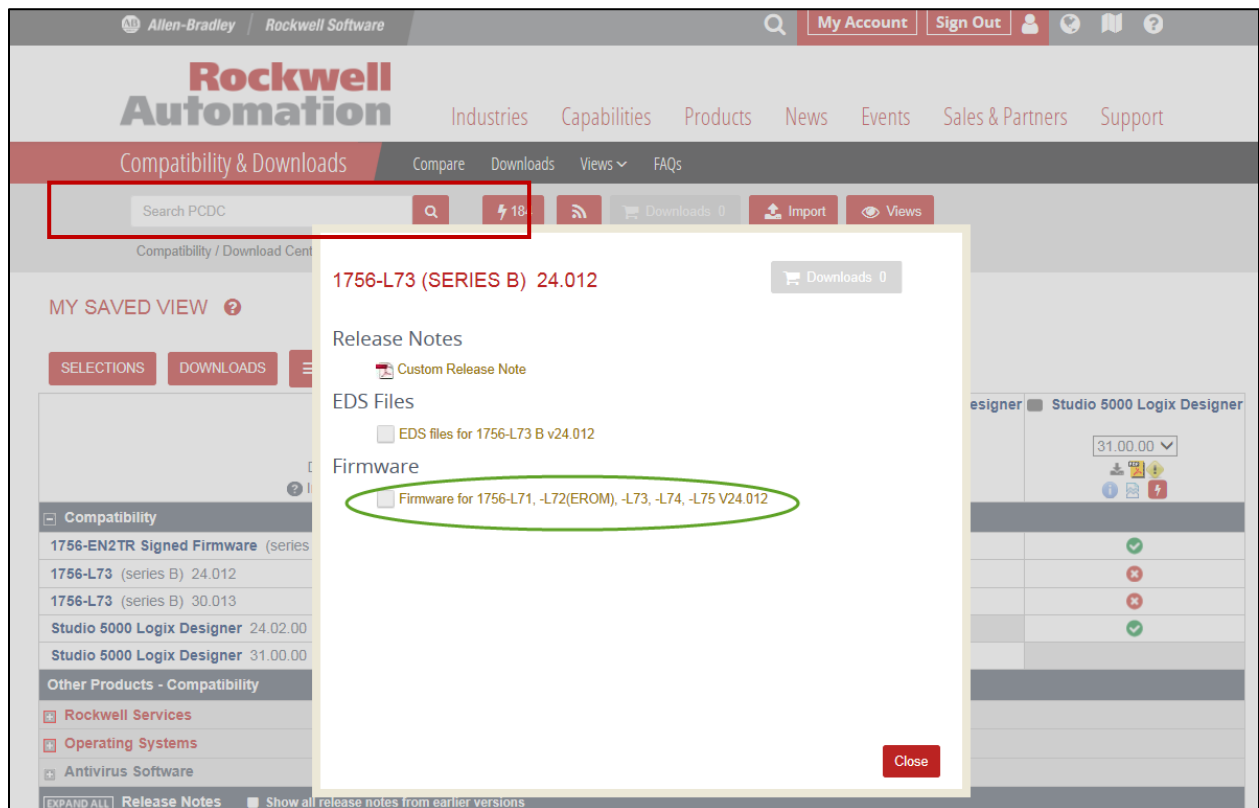

The screenshot displays the Rockwell Automation website interface. The top navigation bar includes the Rockwell Automation logo and links for Industries, Capabilities, Products, News, Events, Sales & Partners, and Support. Below this is a secondary navigation bar with 'Compatibility & Downloads' selected, and sub-links for Compare, Downloads, Views, and FAQs. A search bar labeled 'Search PCDC' is visible, with a red box highlighting the search icon and a lightning bolt icon. A modal window titled '1756-L73 (SERIES B) 24.012' is open, showing 'Release Notes', 'EDS Files', and 'Firmware' sections. The 'Firmware' section contains a checkbox labeled 'Firmware for 1756-L71, -L72(EROM), -L73, -L74, -L75 V24.012', which is circled in green. A 'Close' button is located at the bottom right of the modal. The background shows a 'MY SAVED VIEW' section with a table of compatibility information, including entries for '1756-EN2TR Signed Firmware', '1756-L73 (series B) 24.012', and 'Studio 5000 Logix Designer'.

4. Click I Agree on the License Agreement to start the download.

Software End-User License Agreement Language Selected: English

ROCKWELL AUTOMATION END USER LICENSE AGREEMENT
Rev (02/2016)
IMPORTANT—READ THIS AGREEMENT CAREFULLY

This end user license agreement ("EULA") is a legal contract between You (either an individual or a single entity) and Rockwell Automation, Inc. ("Rockwell Automation") for the Software product(s) and Documentation that Rockwell Automation licenses to You. ROCKWELL AUTOMATION IS WILLING TO LICENSE THE SOFTWARE AND DOCUMENTATION TO YOU ONLY ON THE CONDITION THAT YOU ACCEPT ALL OF THE TERMS AND CONDITIONS IN THIS EULA. YOU ACCEPT AND AGREE TO BE BOUND BY THE TERMS OF THIS EULA BY DOWNLOADING, INSTALLING, COPYING, OR OTHERWISE USING THE SOFTWARE. IF YOU ARE ACCEPTING THESE TERMS ON BEHALF OF ANOTHER PERSON, COMPANY, OR OTHER LEGAL ENTITY, YOU REPRESENT AND WARRANT THAT YOU HAVE FULL AUTHORITY TO BIND THAT PERSON, COMPANY, OR LEGAL ENTITY TO THESE TERMS. IF YOU DO NOT AGREE TO THESE TERMS, DO NOT DOWNLOAD, INSTALL, COPY, ACCESS, OR USE THE SOFTWARE, AND PROMPTLY RETURN THE SOFTWARE WITH ALL ACCOMPANYING ITEMS TO YOUR PLACE OF PURCHASE FOR A FULL REFUND, OR IF YOU DOWNLOADED THE PROGRAM, CONTACT THE PARTY FROM WHOM YOU ACQUIRED IT.


1. DEFINITIONS

1.1. Activation Certificate: means a document included with the Software that may provide, among other things, Your Software Activation Key and specific information regarding the License Type and License Term.

Profile Details [Edit Profile](#)


| | | | |
|---------------|----------------|----------------|------------------------|
| Name: | Gopi Reddy | Phone: | 1111111114 |
| Company Name: | RA | Fax: | |
| Address: | 1201 S 2nd St | Email: | gopireddy_br@yahoo.com |
| | Milwaukee, WI, | Industry Type: | |
| | US, 53204 | Customer Type: | |

5. Choose Managed Download.

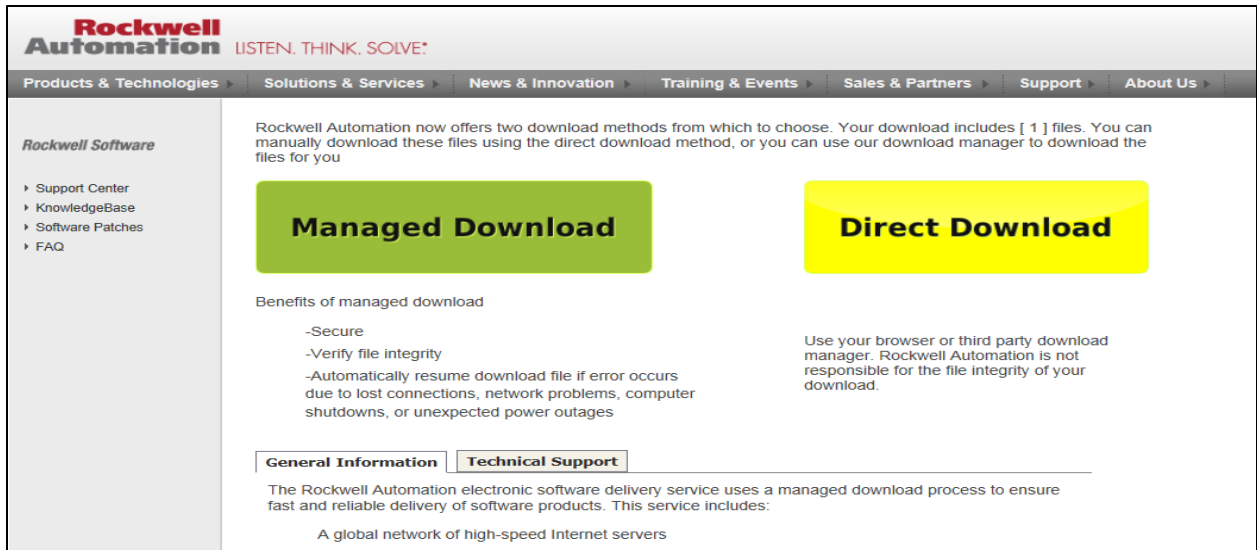


6. If you want to change the location the download stores to, click Change and select the location.

The default location is Users > Public > Public Downloads > RATemp > RA Firmware

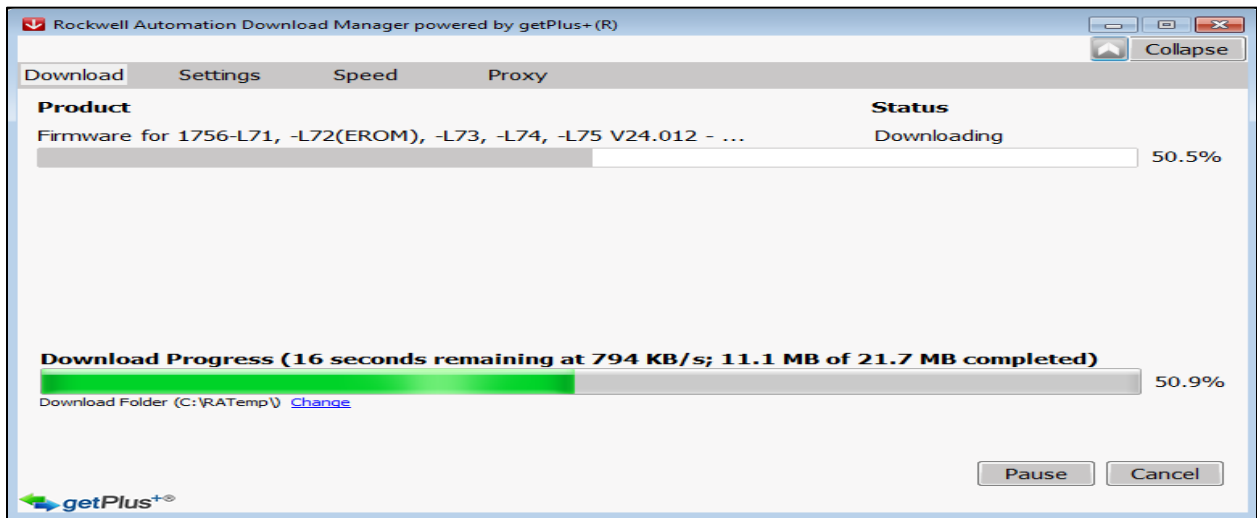

7. When the download is complete, click Open to see the location.

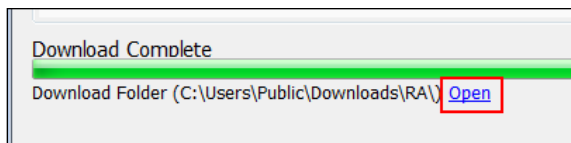

8. Click the the X in the top, right corner of the window to close the download window.

Exercise 2: Review and Download Serialized Software Products

Assume you that as part of your controller upgrade to version 20, you are also upgrading operator stations to new computer. The operator stations use different software products. Make sure the software products you select are compatible with your controllers.

In this exercise, you will:

- Add a software product to a saved view.
- Search for a Software product.

Add a Software Product to a Saved View

Follow these steps to add a software product to an existing product comparison.

1. Return to the compare matrix of your saved view.

The window identifies the view.


MY SAVED VIEW ?

SELECTIONS DOWNLOADS ☰

| | 1756-EN2TR Signed Firmware | 1756-L73 | 1756-L73 | Studio 5000 Logix Designer | Studio 5000 Logix Designer |
|--|----------------------------|----------|----------|----------------------------|----------------------------|
| Series | series C | series B | series B | | |
| Version | 10.010 | 24.012 | 30.013 | 24.02.00 | 31.00.00 |
| Downloads | | | | | |
| Information | | | | | |
| Compatibility | | | | | |
| 1756-EN2TR Signed Firmware (series C) 10.010 | | ● | ● | ✓ | ✓ |
| 1756-L73 (series B) 24.012 | ● | | ● | ✓ | ✗ |
| 1756-L73 (series B) 30.013 | ● | ● | | ✗ | ✗ |
| Studio 5000 Logix Designer 24.02.00 | ✓ | ✓ | ✗ | | ✓ |
| Studio 5000 Logix Designer 31.00.00 | ✓ | ✗ | ✗ | ✓ | |
| Other Products - Compatibility | | | | | |
| Rockwell Services | | | | | |
| Operating Systems | | | | | |

2. Click Selections.

3. Add FactoryTalk View Site Edition, Version 10.00.01 to add to the Selections window.

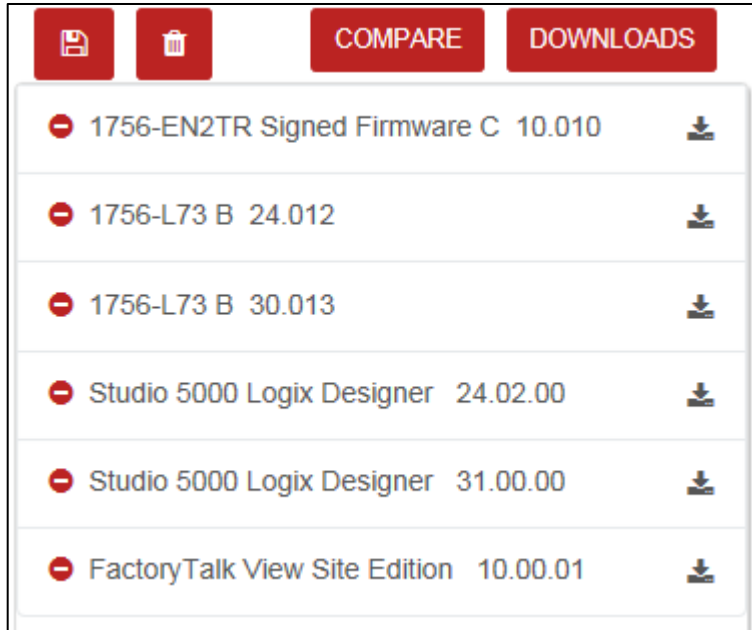

4. Click Compare.

COMPARE SELECTIONS ?


SELECTIONS DOWNLOADS ≡

| | 1756-EN2TR Signed Firmware | 1756-L73 | 1756-L73 | Studio 5000 Logix Designer | Studio 5000 Logix Designer | FactoryTalk View Site Edition |
|--|----------------------------|----------|----------|----------------------------|----------------------------|-------------------------------|
| Series | series C | series B | series B | | | |
| Version | 10.010 | 24.012 | 30.013 | 24.02.00 | 31.00.00 | 10.00.01 |
| Downloads | 📄 📄 📄 | 📄 📄 📄 | 📄 📄 📄 | 📄 📄 📄 | 📄 📄 📄 | 📄 📄 📄 |
| Information | 🔍 📄 | 🔍 📄 | 🔍 📄 | 🔍 📄 | 🔍 📄 | 🔍 📄 |
| Compatibility | | | | | | |
| 1756-EN2TR Signed Firmware (series C) 10.010 | | ● | ● | ✓ | ✓ | ● |
| 1756-L73 (series B) 24.012 | ● | | ● | ✓ | ✗ | ● |
| 1756-L73 (series B) 30.013 | ● | ● | | ✗ | ✗ | ● |
| Studio 5000 Logix Designer 24.02.00 | ✓ | ✓ | ✗ | | ✓ | ✓ |
| Studio 5000 Logix Designer 31.00.00 | ✓ | ✗ | ✗ | ✓ | | ✓ |
| FactoryTalk View Site Edition 10.00.01 | ● | ● | ● | ✓ | ✓ | |
| Other Products - Compatibility | | | | | | |

5. Use the pull-down menu to see the available versions for FactoryTalk View Site Edition software.
6. Scroll down and expand Operating Systems and expand Windows 10.

| Operating Systems | 1756-EN2TR Signed Firmware C 10.010 | 1756-L73 B 24.012 | 1756-L73 B 30.013 | Studio 5000 Logix Designer 24.02.00 | Studio 5000 Logix Designer 31.00.00 | FactoryTalk View Site Edition 10.00.01 |
|---|---|-------------------------|-------------------------|--|--|---|
| General | | | | | | |
| Windows 10 | | | | | | |
| Windows 10 Enterprise, 32-bit, Version 1511 | ● | ● | ● | ● | ● | ✖ |
| Windows 10 Enterprise, 32-bit, Version 1607 | ● | ● | ● | ● | ● | ! |
| Windows 10 Enterprise, 32-bit, Version 1703 | ● | ● | ● | ● | ● | ✓ |
| Windows 10 Enterprise, 32-bit, Version 1709 | ● | ● | ● | ● | ● | ✓ |
| Windows 10 Enterprise, 64-bit, Version 1511 | ● | ● | ● | ● | ● | ✖ |
| Windows 10 Enterprise, 64-bit, Version 1607 | ● | ● | ● | ✓ | ✓ | ! |
| Windows 10 Enterprise, 64-bit, Version 1703 | ● | ● | ● | ✓ | ✓ | ✓ |
| Windows 10 Enterprise, 64-bit, Version 1709 | ● | ● | ● | ● | ● | ✓ |
| Windows 10 Professional, 32-bit, Version 1511 | ● | ● | ● | ● | ● | ✖ |
| Windows 10 Professional, 32-bit, Version 1607 | ● | ● | ● | ● | ● | ! |
| Windows 10 Professional, 32-bit, Version 1703 | ● | ● | ● | ● | ● | ✓ |
| Windows 10 Professional, 32-bit, Version 1709 | ● | ● | ● | ● | ● | ✓ |
| Windows 10 Professional, 64-bit, Version 1511 | ● | ● | ● | ● | ● | ✖ |
| Windows 10 Professional, 64-bit, Version 1607 | ● | ● | ● | ✓ | ✓ | ! |
| Windows 10 Professional, 64-bit, Version 1703 | ● | ● | ● | ✓ | ✓ | ✓ |
| Windows 10 Professional, 64-bit, Version 1709 | ● | ● | ● | ● | ● | ✓ |

Notice that the Studio 5000 Logix Designer V31.00.00 and the FactoryTalk View SE software V10.00.01 both support (✓) some of the same Windows 10 operating systems.

9. Select Save from the menu () to save the above the compatibility matrix to a view.

If prompted to overwrite your existing View, click Yes.

10. Return to the compare matrix window.
11. With your Saved View open, scroll down and expand Antivirus Software.

| Antivirus Software | 1756-EN2TR Signed Firmware C 10.010 | 1756-L73 B 24.012 | 1756-L73 B 30.011 | Studio 5000 Logix Designer 24.01.00 | Studio 5000 Logix Designer 30.00.00 | FactoryTalk View Site Edition 9.00.00 |
|---|---|-------------------------|-------------------------|--|--|--|
| McAfee (KB 67054) | | | | ! | ! | ! |
| Symantec Endpoint Protection (SEP) (KB 64182) | | | | ! | ! | ! |


12. Click the Maybe Compatible icon (!).

You will see a technical note related to the combination the icon represents on the grid. If no technical note available, it will do a search on the combination in the knowledge base and displays the results.


Search for a Specific Item

Follow these steps to search for a specific item.

1. At the top of any PCDC page, find the PCDC search field.




2. In the search field, type your search criteria and select the best option.

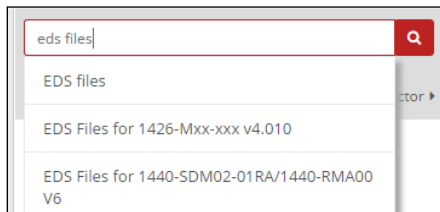

You can enter a keyword, product name, or catalog number.

3. Click  .

The search results appear.

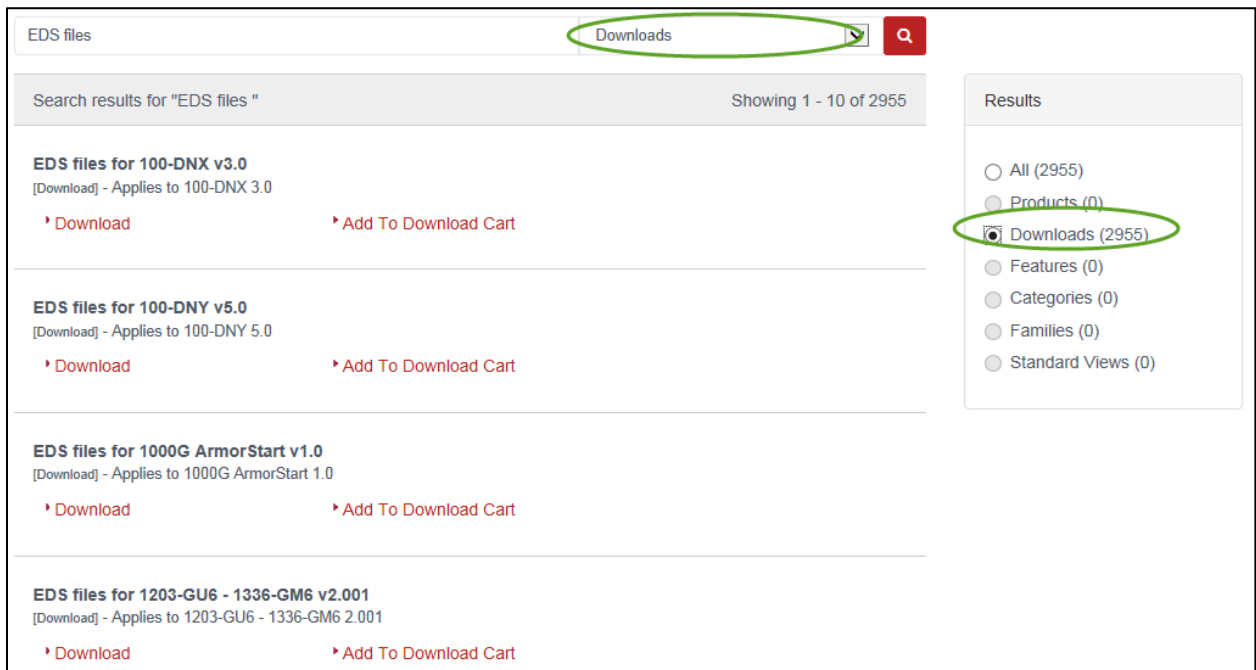

You can use the pull down menu and the radio buttons to filter the results.


Exercise 3: Subscriptions and Notifications

You can set up subscriptions to individual products so that you receive notifications about product-related events.

Follow these steps to subscribe to products.


1. Return to the compare matrix of your saved view.


The window identifies the view.

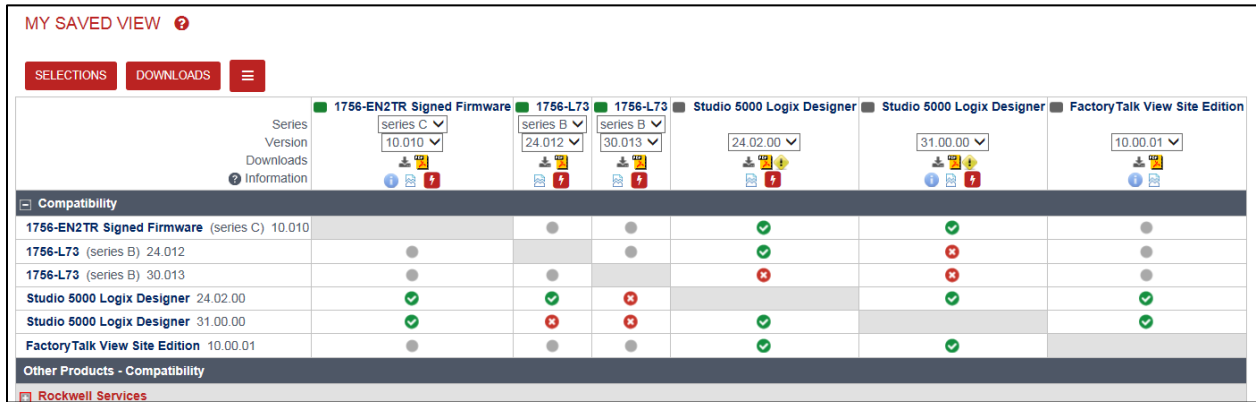

The screenshot shows a window titled "MY SAVED VIEW" with a red question mark icon. It features a header with "SELECTIONS" and "DOWNLOADS" buttons, and a menu icon. Below the header, there are columns for different products: "1756-EN2TR Signed Firmware", "1756-L73", "1756-L73", "Studio 5000 Logix Designer", "Studio 5000 Logix Designer", and "FactoryTalk View Site Edition". Each column has a dropdown for "Series" and "Version", and a "Downloads" button. A "Compatibility" section is expanded, showing a table with rows for each product and columns for each product. The table contains green checkmarks, red X's, and grey circles indicating compatibility. At the bottom, there are "Other Products - Compatibility" and "Rockwell Services" links.


| | 1756-EN2TR Signed Firmware | 1756-L73 | 1756-L73 | Studio 5000 Logix Designer | Studio 5000 Logix Designer | FactoryTalk View Site Edition |
|--|----------------------------|----------|----------|----------------------------|----------------------------|-------------------------------|
| 1756-EN2TR Signed Firmware (series C) 10.010 | | ● | ● | ✓ | ✓ | ● |
| 1756-L73 (series B) 24.012 | ● | | ● | ✓ | ✗ | ● |
| 1756-L73 (series B) 30.013 | ● | ● | | ✗ | ✗ | ● |
| Studio 5000 Logix Designer 24.02.00 | ✓ | ✓ | ✗ | | ✓ | ✓ |
| Studio 5000 Logix Designer 31.00.00 | ✓ | ✗ | ✗ | ✓ | | ✓ |
| FactoryTalk View Site Edition 10.00.01 | ● | ● | ● | ✓ | ✓ | |


2. Select Subscribe from the menu () to view subscription options.

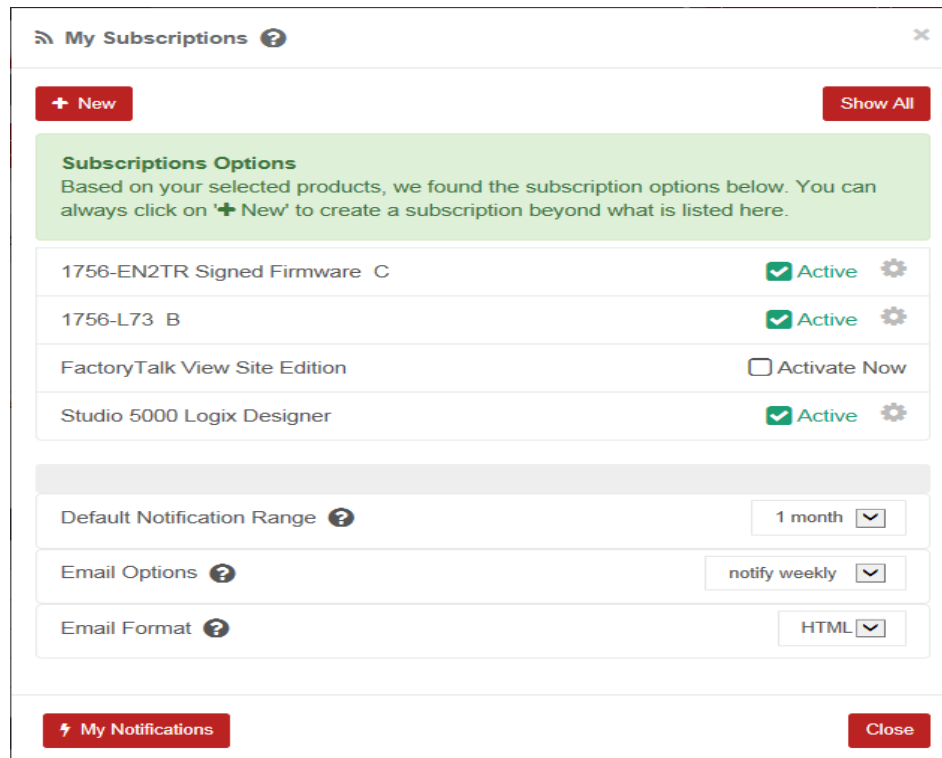

The screenshot shows a window titled "My Subscriptions" with a red question mark icon and a close button. It features a "+ New" button and a "Show All" button. Below the buttons, there is a green box with the text "Subscriptions Options" and a paragraph: "Based on your selected products, we found the subscription options below. You can always click on '+ New' to create a subscription beyond what is listed here." Below this, there is a list of products with their subscription status: "1756-EN2TR Signed Firmware C" (Active), "1756-L73 B" (Active), "FactoryTalk View Site Edition" (Activate Now), and "Studio 5000 Logix Designer" (Active). Below the list, there are settings for "Default Notification Range" (1 month), "Email Options" (notify weekly), and "Email Format" (HTML). At the bottom, there are "My Notifications" and "Close" buttons.

3. Click the Activate Now check box for each product you want.

- Select the Notification Range and Email Options you prefer.
- Click  to define Notification criteria for a product.

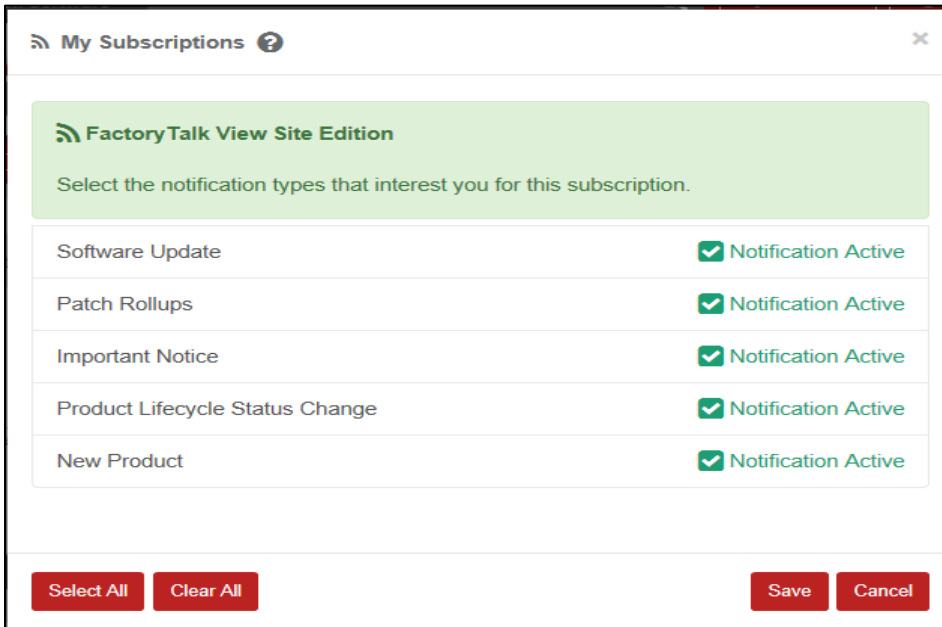

My Subscriptions ?


FactoryTalk View Site Edition

Select the notification types that interest you for this subscription.

| | |
|---------------------------------|---|
| Software Update | <input checked="" type="checkbox"/> Notification Active |
| Patch Rollups | <input checked="" type="checkbox"/> Notification Active |
| Important Notice | <input checked="" type="checkbox"/> Notification Active |
| Product Lifecycle Status Change | <input checked="" type="checkbox"/> Notification Active |
| New Product | <input checked="" type="checkbox"/> Notification Active |

Select All Clear All Save Cancel

- Click My Notifications to view current notifications for the product subscriptions you activated.

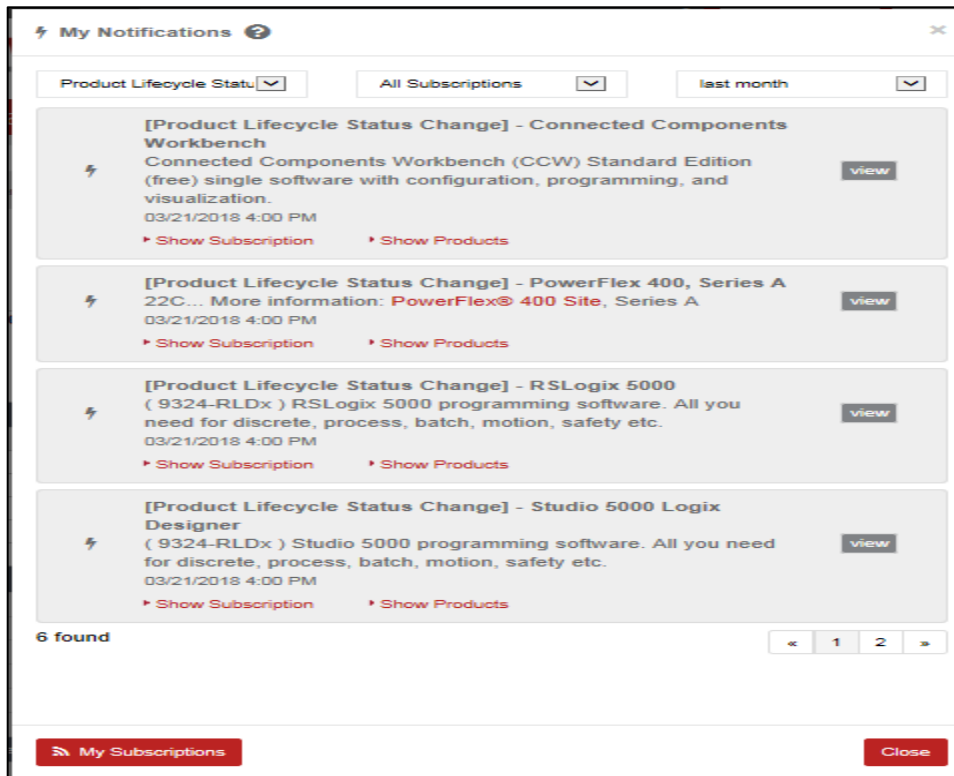

My Notifications ?

Product Lifecycle Statu... All Subscriptions last month


- [Product Lifecycle Status Change] - Connected Components Workbench**
Connected Components Workbench (CCW) Standard Edition (free) single software with configuration, programming, and visualization.
03/21/2018 4:00 PM
[Show Subscription](#) [Show Products](#) [view](#)
- [Product Lifecycle Status Change] - PowerFlex 400, Series A**
22C... More information: **PowerFlex® 400 Site, Series A**
03/21/2018 4:00 PM
[Show Subscription](#) [Show Products](#) [view](#)
- [Product Lifecycle Status Change] - RSLogix 5000**
(9324-RLDx) RSLogix 5000 programming software. All you need for discrete, process, batch, motion, safety etc.
03/21/2018 4:00 PM
[Show Subscription](#) [Show Products](#) [view](#)
- [Product Lifecycle Status Change] - Studio 5000 Logix Designer**
(9324-RLDx) Studio 5000 programming software. All you need for discrete, process, batch, motion, safety etc.
03/21/2018 4:00 PM
[Show Subscription](#) [Show Products](#) [view](#)

6 found < 1 2 >

[My Subscriptions](#) [Close](#)


Modify Subscriptions

Follow these steps to modify product subscriptions.

1. From any PCDC screen, click .




Your active subscriptions appear.

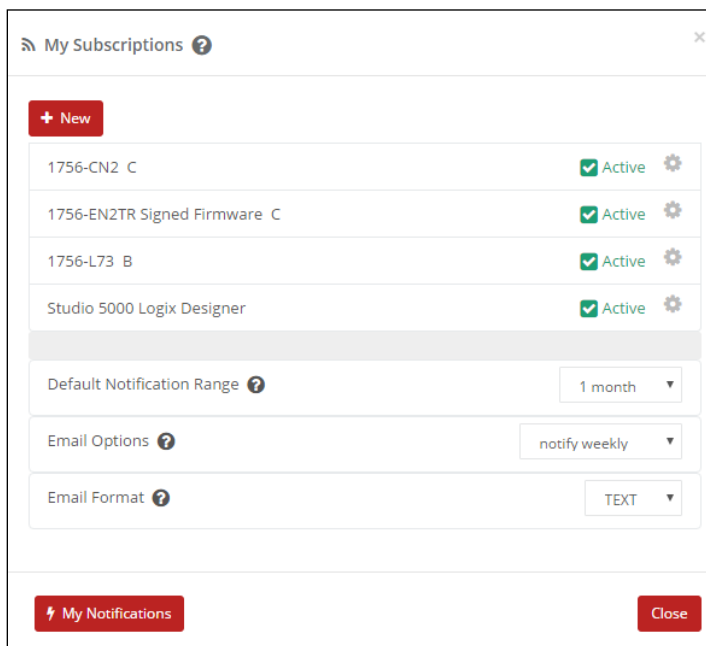

2. Add or remove products.
3. Modify the notifications options.
4. Click Close when finished.

View Notifications


Follow these steps to view product notifications.

1. From any PCDC screen, click .



The number in the icon identifies how many notifications you have pending.

2. From the notifications list, click View to see more information about the product.

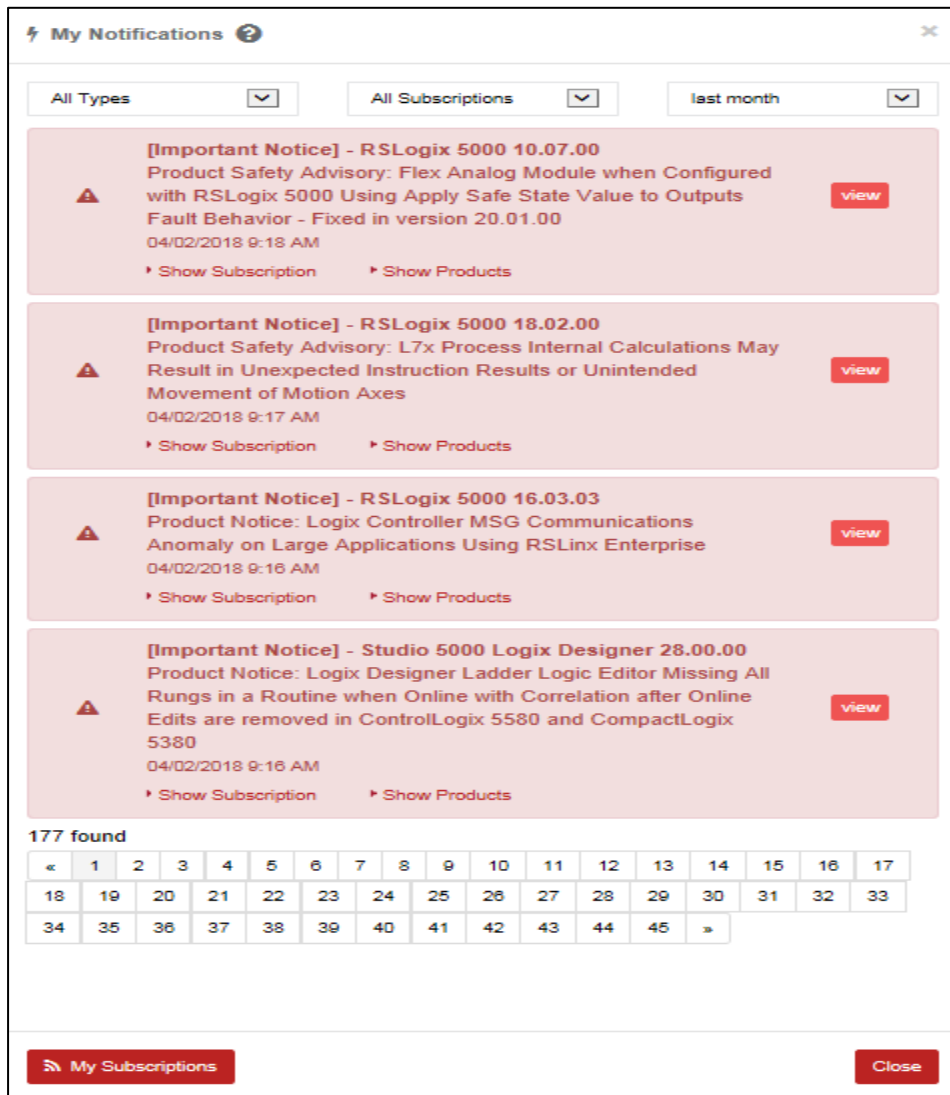

The screenshot shows a modal window titled "My Notifications" with a close button in the top right. At the top, there are three filter dropdowns: "All Types", "All Subscriptions", and "last month". The main content area contains four notification cards, each with a red warning triangle icon, a title, a detailed description, a date and time, and a "view" button. Below the cards, it says "177 found" and displays a pagination table with numbers 1 through 45, and navigation arrows. At the bottom, there are two buttons: "My Subscriptions" and "Close".

| | | | | | | | | | | | | | | | | | |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| < | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 |
| 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | | |
| 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | 42 | 43 | 44 | 45 | > | | | | | |

You can filter on Type, Subscription, and Frequency.

Exercise 4: Other Views to Help Determine Compatibility

In this exercise, you will use other features of the Product Compatibility and Download Center to:

- Determine what operating systems are supported by a specific software product
- Find a specific feature and determine whether that feature is supported by a specific product
- Display product versions and determine whether you can replace an older version with a newer version
- Display a category to determine what products support EtherNet/IP networks
- Work with standard views

Determine What Operating Systems Are Supported by a Specific Software Product


Follow these steps to select a single product and review the operating systems and features supported by different versions of the product.

1. From the PCDC Landing page, click Available Versions.

You see the following on the screen.

The screenshot shows the Rockwell Automation Product Compatibility and Download Center (PCDC) landing page. The page has a navigation bar with links for Industries, Capabilities, Products, News, Events, Sales & Partners, and Support. Below the navigation bar, there is a breadcrumb trail: Home > Support > Product Resources. The main heading is 'Compatibility & Downloads' with a sub-heading: 'The Product Compatibility and Download Center (PCDC) can help you find product-related downloads including firmware, release notes, associated software, drivers, tools and utilities.' A 'What's New...' banner is present. The page is divided into several sections: 'Support' (with a 'Provide Feedback' button), 'Downloads' (with a list of download types), 'PCDC Feedback' (with a 'Provide Feedback' button), 'Compare' (with a description of the compare feature), 'Download' (with a description of the download feature), and 'Views' (with a description of the views feature). The 'Views' section is circled in green, and the 'Available Versions' link is highlighted.

2. Click Select a Product.

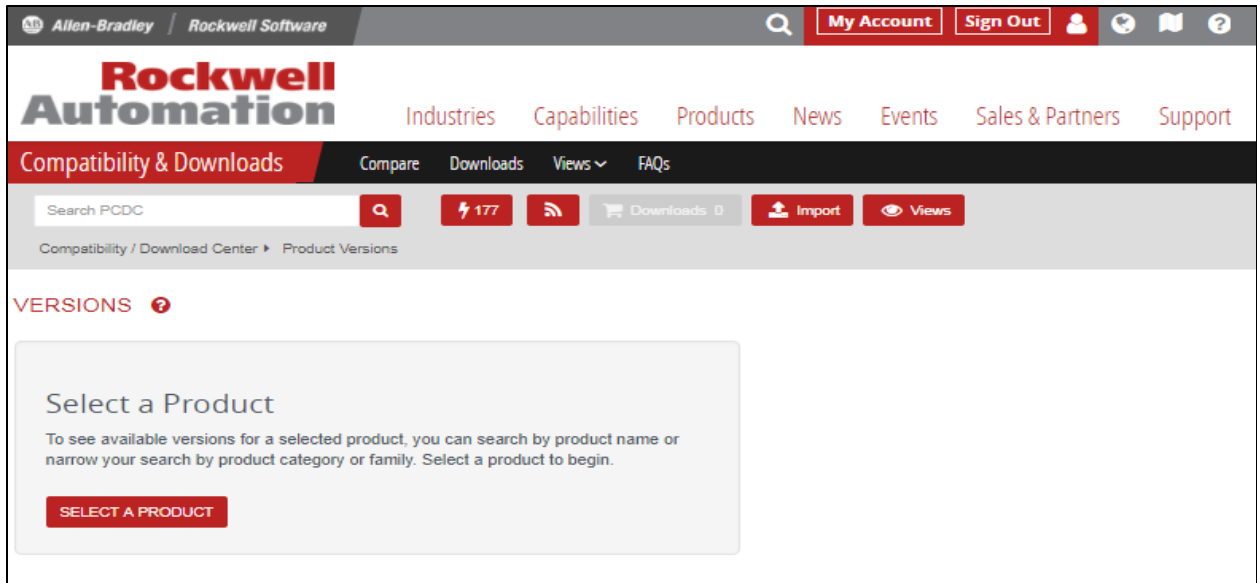

3. In the Search field, type Studio 5000 Logix Designer
 You can enter partial text here too, such as Logix or 5000.
 As you type, a list of products matching the letters you type appears.

3. Select Studio 5000 Logix Designer.

4. In the product window, collapse, expand Operating Systems and expand Windows 8.

The screenshot shows the 'VERSIONS' page for 'Studio 5000 Logix Designer'. At the top, there is a 'CHANGE PRODUCT' button and a menu icon. Below this, the product name 'Studio 5000 Logix Designer' is displayed, along with a description: '(9324-RLDr) Studio 5000 programming software. All you need for discrete, process, batch, motion, safety etc.' A table of versions is shown with columns for 'Version' and 'Downloads'. The table is expanded to show 'Operating Systems' and 'Windows 10'. The 'Windows 10' section is further expanded to show a compatibility matrix for various Windows 10 operating systems across different versions of the Logix Designer application.

| Version | 31.00.00 | 30.01.01 | 30.01.00 | 30.00.00 | 29.00.01 | 28.03.00 | 28.02.01 | 27.00.00 |
|---|----------|----------|----------|----------|----------|----------|----------|----------|
| Windows 10 Professional, 32-bit, Version 1703 | ● | ● | ● | ● | ✖ | ✖ | ✖ | ✖ |
| Windows 10 Enterprise, 32-bit, Version 1703 | ● | ● | ● | ● | ✖ | ✖ | ✖ | ✖ |
| Windows 10 Professional, 64-bit, Version 1703 | ✓ | ✓ | ✓ | ✓ | ● | ✓ | ● | ● |
| Windows 10 Enterprise, 64-bit, Version 1703 | ✓ | ✓ | ✓ | ✓ | ● | ✓ | ● | ● |
| Windows 10 Professional, 32-bit, Version 1607 | ● | ● | ● | ● | ✖ | ✖ | ✖ | ✖ |
| Windows 10 Enterprise, 32-bit, Version 1607 | ● | ● | ● | ● | ✖ | ✖ | ✖ | ✖ |
| Windows 10 Professional, 64-bit, Version 1607 | ✓ | ✓ | ✓ | ✓ | ● | ✓ | ● | ● |
| Windows 10 Enterprise, 64-bit, Version 1607 | ✓ | ✓ | ✓ | ✓ | ● | ✓ | ● | ● |

You can now see the Windows 10 Operating systems supported by different versions of the Logix Designer application.

Find a Specific Feature and Determine Whether that Feature Is Supported by a Specific Product


Follow these steps to search for products that support a specific feature.

1. From the PCDC Landing Page, click Features & Attributes.


The screenshot shows the Rockwell Automation PCDC landing page. The navigation bar includes 'Industries', 'Capabilities', 'Products', 'News', 'Events', 'Sales & Partners', and 'Support'. The breadcrumb trail is 'Home > Support > Product Resources'. The main heading is 'Compatibility & Downloads'. Below the heading is a search field labeled 'Search PCDC' with a search icon and buttons for '177', 'Import', and 'Views'. The page is divided into three main sections: 'Compare', 'Download', and 'Views'. The 'Views' section has three sub-sections: 'Configured Views', 'Available Versions', and 'Features & Attributes'. The 'Features & Attributes' sub-section is circled in green and contains the text 'See all products that support a specific feature or attribute.' and a link 'Features & Attributes'.

2. In the search field, type CIP Motion.

As you type, a list of products matching the letters you type appears.

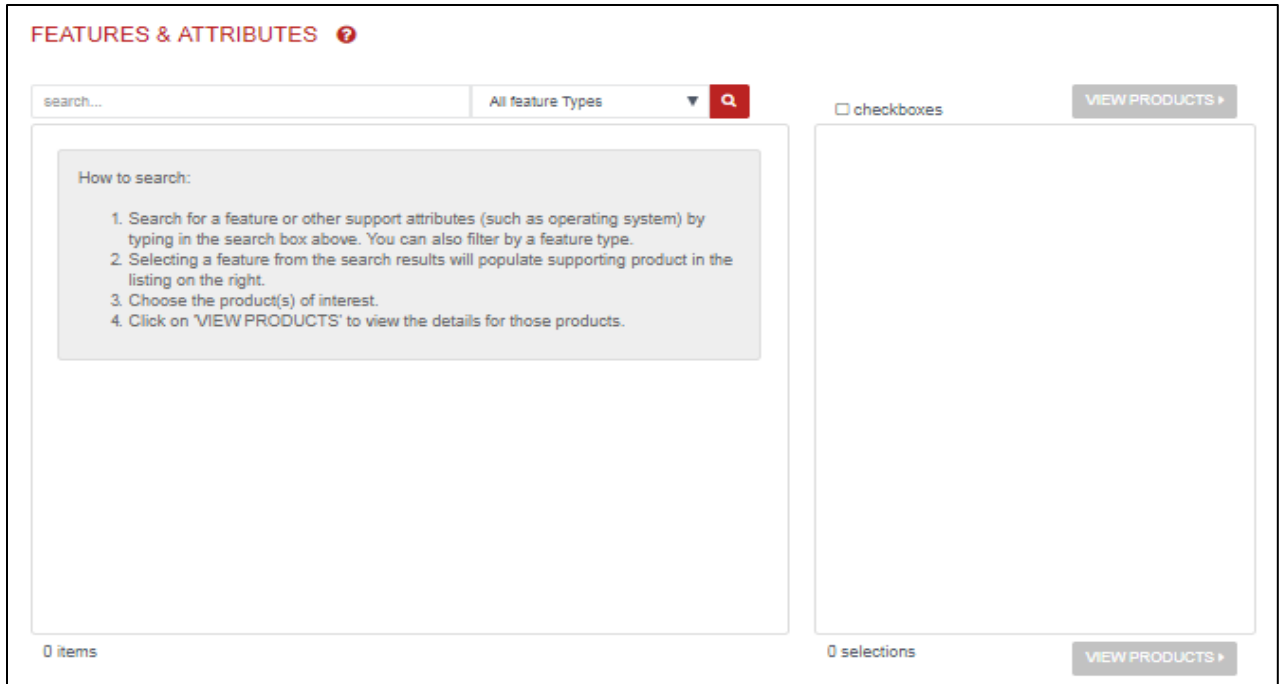

3. Select CIP Motion Using EtherNet/IP Networks.

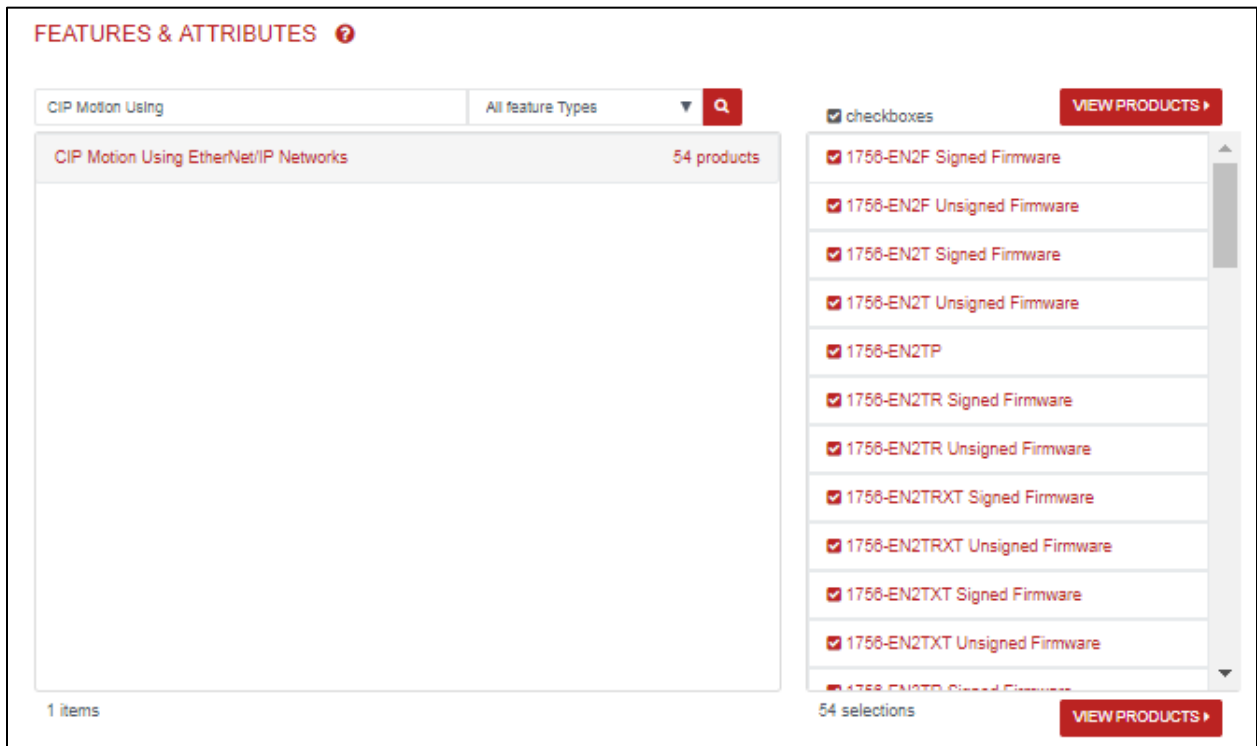

4. Click View Products.

SELECTED FEATURE OR ATTRIBUTE ?

SELECTIONS DOWNLOADS

| | 1756-EN2F Signed Firmware | 1756-EN2F Unsigned Firmware | 1756-EN2T Signed Firmware | 1756-EN2T Unsigned Firmware | 1756-EN2TP | 1756-EN2TR Signed Firmware | 1756-EN2TR Unsigned Firmware |
|--|---------------------------|-----------------------------|---------------------------|-----------------------------|------------|----------------------------|------------------------------|
| Series | series C | series B | series D | series C | series A | series C | series B |
| Version | 10.010 | 5.008 | 10.010 | 5.008 | 10.020 | 10.010 | 5.008 |
| Downloads | | | | | | | |
| Information | | | | | | | |
| Selected Feature or Attribute | | | | | | | |
| CIP Motion Using EtherNet/IP Networks | | | | | | | |
| Compatibility | | | | | | | |
| 1756-EN2F Signed Firmware (series C) 10.010 | | | | | | | |
| 1756-EN2F Unsigned Firmware (series B) 5.008 | | | | | | | |
| 1756-EN2T Signed Firmware (series D) 10.010 | | | | | | | |
| 1756-EN2T Unsigned Firmware (series C) 5.008 | | | | | | | |
| 1756-EN2TP (series A) 10.020 | | | | | | | |
| 1756-EN2TR Signed Firmware (series C) 10.010 | | | | | | | |
| 1756-EN2TR Unsigned Firmware (series B) 5.008 | | | | | | | |
| 1756-EN2TRXT Signed Firmware (series C) 10.010 | | | | | | | |
| 1756-EN2TRXT Unsigned Firmware (series B) 5.028 - Signed | | | | | | | |
| 1756-EN2TXT Signed Firmware (series D) 10.010 | | | | | | | |

All the products shown above support CIP Motion Using EtherNet/IP Networks.

Determine Whether You Can Replace an Older Version with a Newer Version

Follow these steps to select a hardware product and review the available versions. Use the details of the available versions to determine whether you can replace the version you have with a newer version that must support all the existing features you use and provide enhanced and additional features.

1. From the Landing Page, click on Available Versions.

The screenshot shows the Rockwell Automation PCDC landing page. The header includes the Rockwell Automation logo and navigation links for Industries, Capabilities, Products, News, Events, Sales & Partners, and Support. Below the header is a breadcrumb trail: Home > Support > Product Resources. The main content area is titled 'Compatibility & Downloads' and includes a sub-header: 'The Product Compatibility and Download Center (PCDC) can help you find product-related downloads including firmware, release notes, associated software, drivers, tools and utilities.' A 'What's New...' notification box is present. The page is divided into several sections: 'Support' (with a 'Provide Feedback' button), 'Downloads' (with a list of links), 'Compare' (with a description and a 'Compare Products' link), 'Download' (with a description and links for 'Find Downloads' and 'Software Downloads by Serial Number'), and 'Views' (with three sub-sections: 'Configured Views', 'Available Versions' (circled in green), and 'Features & Attributes'). A search bar is located at the top of the main content area.

You see the following on the screen.

The screenshot shows the 'VERSIONS' section of the PCDC website. It has a heading 'VERSIONS' with a question mark icon. Below the heading is a sub-heading 'Select a Product' and a text box that reads: 'To see available versions for a selected product, you can search by product name or narrow your search by product category or family. Select a product to begin.' At the bottom of the text box is a red button labeled 'SELECT A PRODUCT'.

2. Click Select a Product.

3. In the Search field, type 1756-L73.
As you type, a list of products matching the letters you type appears.

4. Select the 1756-L73, series B controller.

You can see the different versions of the product and the supported features and attributes.

VERSIONS ?

CHANGE PRODUCT [Menu Icon]

1756-L73 (series B)
ControlLogix Controllers

| Version | 30.013 | 30.012 | 30.011 | 29.011 | 28.012 | 28.011 | 27.011 |
|-------------|--------|--------|--------|--------|--------|--------|--------|
| Downloads | | | | | | | |
| Information | | | | | | | |

Product Features

General

| Feature | 30.013 | 30.012 | 30.011 | 29.011 | 28.012 | 28.011 | 27.011 |
|--|--------|--------|--------|--------|--------|--------|--------|
| Auto-Save and Recovery | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Activation Key Software Grace Period | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| System Install | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Start Page | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Online Help, Instruction Context Sensitive | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Integrated System Install | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Tip – Click on the icon shown below each product version to view all the other compatible products for that version.

Compatibility Listing [Menu Icon] [Close Icon]

1756-L73 **B** **30.013**

Compatible ✓ Not Compatible ✗ May be Compatible ⚠

Category: Show All

Computers & Operator Interface

- PanelView 5500 (series A) 2.003 ✓
- PanelView 5500 (series A) 2.004 ✓
- PanelView 5500 (series A) 3.001 ✓
- PanelView 5500 (series A) 4.001 ✓
- PanelView 5500 (series A) 4.002 ✓
- PanelView Plus 400/600 5.10.16UP ✓
- PanelView Plus 7 Standard 9.00-20170915UP ✓
- PanelView Plus 700-1500 5.10.16UP ✓
- PanelView Plus 7 Performance 8.20-20170525UP ✓
- PanelView Plus 7 Performance 9.00-20170605UP ✓
- PanelView Plus 7 Standard 10.00-20180110 ✓
- PanelView Plus 7 Standard 8.00-20160421UP ✓

Display a Category to Determine What Products Support EtherNet/IP Networks


Follow these steps to create a list of products that support EtherNet/IP networks.


1. From the PCDC Landing Page, click Compare.

The screenshot shows the Rockwell Automation PCDC landing page. The navigation bar includes 'Industries', 'Capabilities', 'Products', 'News', 'Events', 'Sales & Partners', and 'Support'. The breadcrumb trail is 'Home > Support > Product Resources'. The main heading is 'Compatibility & Downloads'. Below the heading is a search bar and a 'Search PCDC' button. A green circle highlights the 'Compare' link in the 'Compare' section. The 'Compare' section includes a red double-headed arrow icon and the text: 'Before upgrading one or more products, check the compatibility between the new product(s) and the other product(s) in the system.' Below this text is a 'Compare Products' link. The 'Download' section includes a red download icon and the text: 'Select one or more products to view the available downloads for those products.' Below this text are 'Find Downloads' and 'Software Downloads by Serial Number' links. The 'Views' section includes a red list icon and the text: 'Configured Views: Display Rockwell Automation configured views or build your own.' Below this text is a 'Configured Views' link. The 'Available Versions' section includes the text: 'See available versions for a product.' Below this text is an 'Available Versions' link. The 'Features & Attributes' section includes the text: 'See all products that support a specific feature or attribute.' Below this text is a 'Features & Attributes' link. The left sidebar includes 'Support', 'Downloads', and 'PCDC Feedback' sections.

You see the following screen.

The screenshot shows the PCDC 'SELECTIONS' screen. The page title is 'SELECTIONS'. There is a search bar and two dropdown menus: 'All Categories' and 'All Families'. Below the search bar is a message: 'To select one or more products from your search listing, you have the following options:'. The message includes three bullet points: 'To select the latest version, just double click on a product.', 'To select a specific product version. Click on a product and then select a version.', and 'Hold the 'Ctrl' key down to select multiple items and then click 'MOVE SELECTIONS' to finalize your selections.' Below the message is a '0 items' indicator and a 'MOVE SELECTIONS' button. On the right side, there is a list of products with radio buttons for selection. The list includes: '1756-EN2F Signed Firmware C 10.010', '1756-EN2F Unsigned Firmware B 5.008', '1756-EN2T Signed Firmware D 10.010', '1756-EN2T Unsigned Firmware C 5.008', '1756-EN2TR Signed Firmware C 10.010', '1756-EN2TR Unsigned Firmware B 5.008', '1756-EN2TRXT Signed Firmware C 10.010', '1756-EN2TXT Signed Firmware D 10.010', '1756-EN2TXT Unsigned Firmware C 5.008', '1756-EN3TR Signed Firmware B 10.010', and '1756-EN3TR Unsigned Firmware A 5.008'. Below the list is a '63 selections' indicator and a 'COMPARE' button. There are also 'DOWNLOADS' buttons at the top and bottom right of the list.

2. Click  to clear all previous selections
3. In the All Categories pull-down menu select Network & Communication.
4. As soon as you select the category, a list of products from that category displays in the window below the Product Search field.

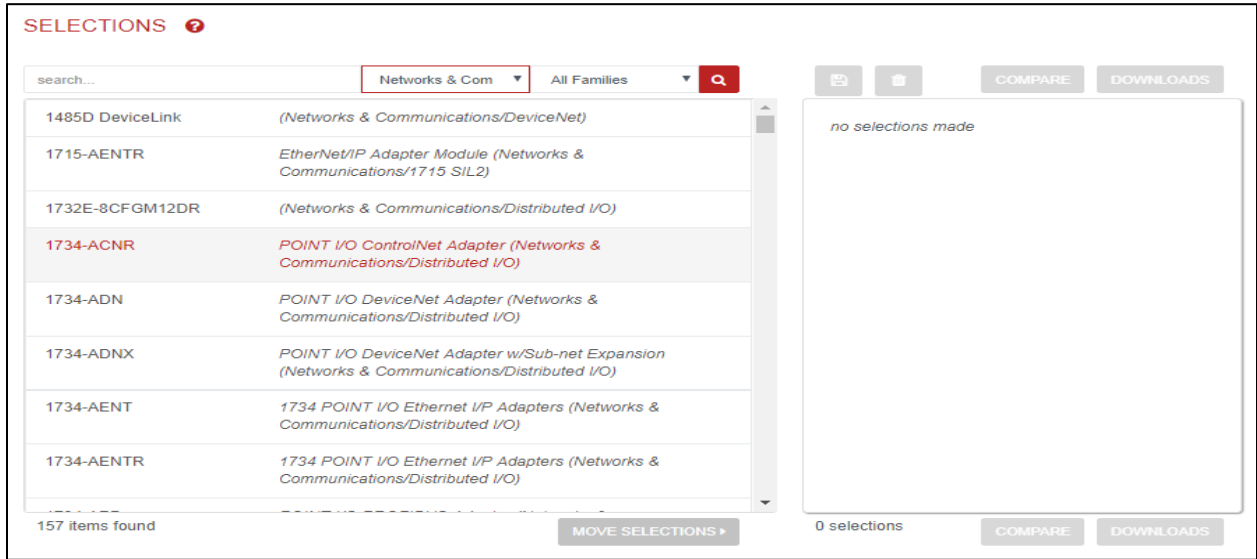

SELECTIONS ⓘ

search... Networks & Com All Families 🔍


| | |
|------------------|---|
| 1485D DeviceLink | (Networks & Communications/DeviceNet) |
| 1715-AENTR | EtherNet/IP Adapter Module (Networks & Communications/1715 SIL2) |
| 1732E-8CFGM12DR | (Networks & Communications/Distributed I/O) |
| 1734-ACNR | POINT I/O ControlNet Adapter (Networks & Communications/Distributed I/O) |
| 1734-ADN | POINT I/O DeviceNet Adapter (Networks & Communications/Distributed I/O) |
| 1734-ADNX | POINT I/O DeviceNet Adapter w/Sub-net Expansion (Networks & Communications/Distributed I/O) |
| 1734-AENT | 1734 POINT I/O Ethernet I/P Adapters (Networks & Communications/Distributed I/O) |
| 1734-AENTR | 1734 POINT I/O Ethernet I/P Adapters (Networks & Communications/Distributed I/O) |

157 items found MOVE SELECTIONS ▶

no selections made

0 selections COMPARE DOWNLOADS

3. In the All Families pull-down, select Distributed I/O.
As soon as you select the family, the list of products shown in the window below the Product Search box is filtered to only those that match that family and category combination.

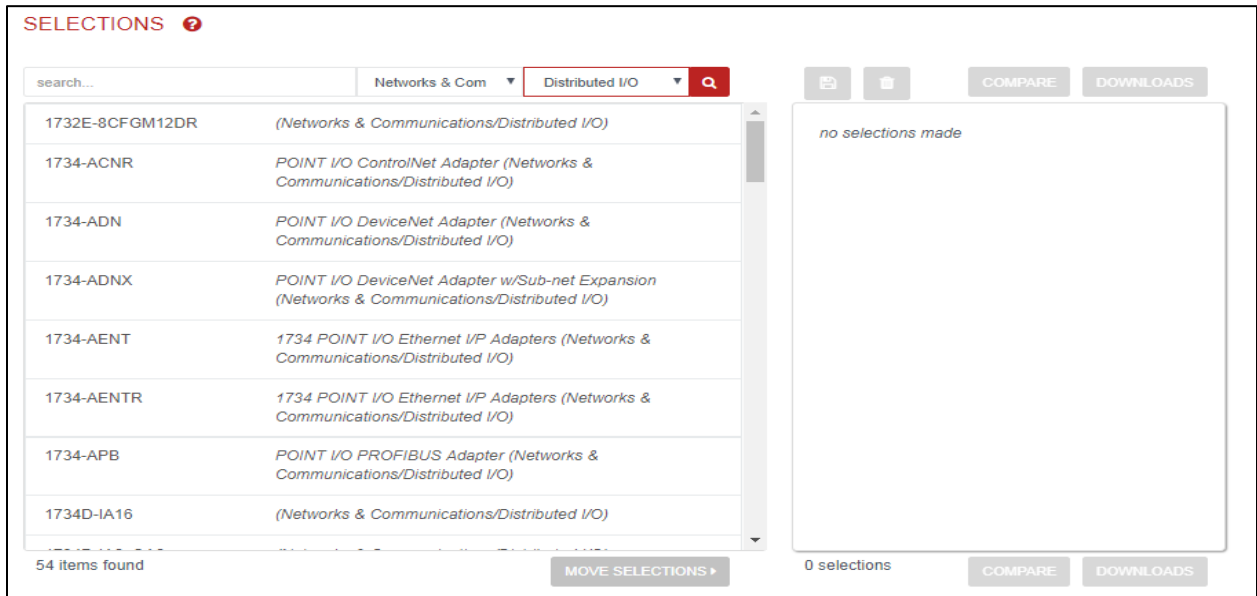

SELECTIONS ⓘ

search... Networks & Com Distributed I/O 🔍

| | |
|------------------|---|
| 1732E-8CFGM12DR | (Networks & Communications/Distributed I/O) |
| 1734-ACNR | POINT I/O ControlNet Adapter (Networks & Communications/Distributed I/O) |
| 1734-ADN | POINT I/O DeviceNet Adapter (Networks & Communications/Distributed I/O) |
| 1734-ADNX | POINT I/O DeviceNet Adapter w/Sub-net Expansion (Networks & Communications/Distributed I/O) |
| 1734-AENT | 1734 POINT I/O Ethernet I/P Adapters (Networks & Communications/Distributed I/O) |
| 1734-AENTR | 1734 POINT I/O Ethernet I/P Adapters (Networks & Communications/Distributed I/O) |
| 1734-APB | POINT I/O PROFIBUS Adapter (Networks & Communications/Distributed I/O) |
| 1734D-IA16 | (Networks & Communications/Distributed I/O) |

54 items found MOVE SELECTIONS ▶

no selections made

0 selections COMPARE DOWNLOADS

Tip – You can also see a similar list of products when you click on Product Versions and select the category and family from the pull-down menus.

Work with Standard Views

Follow these steps to use the standard views made available by Rockwell Automation.

1. From the PCDC Landing Page, click Configured Views.
2. Click Standard Views.
3. Select CompactLogix Controllers {Latest Versions}.

The screenshot displays the 'SELECTIONS' interface with a dropdown menu open for 'Standard Views'. The menu lists various product categories and their corresponding views. The 'CompactLogix' category is selected, and the 'CompactLogix Controllers - Latest Versions' view is highlighted. The interface includes a search bar, a list of items, and buttons for 'MOVE SELECTIONS', 'COMPARE', and 'DOWNLOADS'.

| Item ID | View Name | View Type |
|-----------------|--|--------------------|
| 1732E-8CFGM12DR | CompactLogix Controllers - Latest Versions | Download View |
| 1734-ACNR | ControlLogix Controllers {Latest Versions} | Download View |
| 1734-ADN | Micro 800 Controllers - Latest Versions | Product Group View |
| 1734-ADNX | FactoryTalk View 7 | Comparison View |
| 1734-AENT | All PowerFlex Drives | Download View |
| 1734-AENTR | PowerFlex 750 | Download View |
| 1734-APB | PlantPax | Comparison View |

4. Click on RSLogix 5000 Tab

.The window identifies the view. The window show all latest versions of CompactLogix Controllers

COMPACTLOGIX CONTROLLERS - LATEST VERSIONS

SELECTIONS COMPARE

Studio 5000 Logix Designer RSLinx Classic **RSLogix 5000**

| show selections | Downloads | 20.04.01 | 20.04.00 | 20.01.01 | 19.01.01 | 18.02.00 | 17.01.02 | 16.04.00 | 15 |
|--|--|----------|----------|----------|----------|----------|----------|----------|----|
| 1768-L43 (Series D) CompactLogix L43 Controller 20.019 | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only | ✓ | ✓ | ✓ | ✗ | ✗ | ✗ | ✗ | |
| 1768-L43S (Series B) Compact GuardLogix L43S Controller 20.018 | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only | ✓ | ✓ | ✓ | | | | | |
| 1768-L45 (Series D) CompactLogix L45 Controller 20.019 | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only | ✓ | ✓ | ✓ | ✗ | ✗ | ✗ | ✗ | |
| 1768-L45S (Series B) Compact GuardLogix L45S Controller 20.018 | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only | ✓ | ✓ | ✓ | | | | | |
| 1769-L16ER-BB1B (Series B) CMX5370 L1 controller, 2x EtherNet/IP ports, 384KB memory, 16DI, 16DO, 8x1734 I/O expansion modules, 4 EIP Nodes, 24VDC 30.012 | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only | ✓ | ✓ | ✓ | ✗ | ✗ | ✗ | ✗ | |
| 1769-L18ER-BB1B (Series B) CMX5370 L1 controller, 2x EtherNet/IP ports, 512KB memory, 16DI, 16DO, 8x1734 I/O expansion modules, 8 EIP Nodes, 24VDC 30.012 | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only | ✓ | ✓ | ✓ | ✗ | ✗ | ✗ | ✗ | |
| 1769-L18ERM-BB1B (Series B) CMX5370 L1 controller, 2x EtherNet/IP ports, 512KB memory, 16DI, 16DO, 8x1734 I/O exp. modules, 2 CIP Motion Axes, 8 EIP Node, 24V 30.012 | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only | ✗ | ✗ | ✗ | ✗ | ✗ | ✗ | ✗ | |
| 1769-L20 (Series A) CompactLogix L20 13.019 | <input type="checkbox"/> Select Files <input type="checkbox"/> Firmware Only | ✗ | ✗ | ✗ | ✗ | ✗ | ✗ | ✗ | |

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Publication PCDC-QS001E -EN-P — April 2018
Supersedes PCDC-QS001D-EN-P – February 2017

Copyright© 2018 Rockwell Automation, Inc. All rights reserved.