

# PanelView 5310 Terminals Specifications

Catalog Numbers 2713P-T7WD1, 2713P-T7WD1-B, 2713P-T9WD1, 2713P-T9WD1-B, 2713P-T12WD1, 2713P-T12WD1-B

Topic	Page
Environmental Specifications	2
Certifications	2
Technical Specifications	3
Product Dimensions	4
Studio 5000 Environment	5
Accessories	5
Additional Resources	6

The PanelView™ 5310 terminals are operator interface devices for monitoring and controlling devices that are attached to ControlLogix® 5570 and 5580, and CompactLogix™ L1, L2, and L3 controllers over an EtherNet/IP network. Animated graphic and text displays provide operators a view into the operating state of a machine or process. Operators interact with the control system by using the touch screen.

The PanelView 5310 terminals include these features and capabilities:

- Tightly integrated control and design environment allows information to be shared between the PanelView 5310 terminal and the Logix platforms.
- The Studio 5000® environment provides one point of access for both View Designer and Logix Designer applications.
- Connection to one ControlLogix 5570, ControlLogix 5580, or CompactLogix L1, L2, or L3 controller with revision 27 firmware or later.
- Supports a maximum of 50 user-defined screens.
- Supports a maximum of 1000 Logix-based alarms.
- Easily configured screen navigation menu.



## Environmental Specifications

This table provides environmental specifications for the PanelView 5310 terminals.

Attribute	Value
Temperature, operating	0...50 °C (32...122 °F)
Temperature, nonoperating	-25...+70 °C (-13...+158 °F)
Relative humidity	5...95% without condensation
Vibration	0.012 pk-pk, 10...57 Hz 2 g peak at 57...500 Hz
Shock, operating	15 g at 11 ms
Shock, nonoperating	30 g at 11 ms
Enclosure ratings	NEMA and UL Type 4X, 12, 13, and classified by UL as IP66 (when mounted on a flat surface of an equivalent enclosure)

## Certifications

This table provides certification information for the PanelView 5310 terminals.

Certification <sup>(1)</sup>	Value
c-UL-us	c-UL-us Listed to UL 61010-1, UL 61010-2-201 and CAN/CSA-C22.2 No. 61010-1
CE (EMC)	European Union EMC Directive, compliance with: <ul style="list-style-type: none"> <li>EN 61131-2; Programmable Controllers (pertinent EMC sections)</li> </ul>
EAC	Russian Customs Union TP TC 020/2011 EMC Technical Regulation
EtherNet/IP	ODVA conformance tested to EtherNet/IP specifications
KC	KC registered
RCM	Australian Radiocommunications Act, compliance with: <ul style="list-style-type: none"> <li>EN 61000-6-4; Industrial Emissions</li> </ul>
RoHS	<ul style="list-style-type: none"> <li>China RoHS</li> <li>European RoHS</li> <li>Turkey RoHS (EEE Yönetmeliğine Uygundur. In Conformity with the EEE Regulation)</li> </ul>

(1) When marked. See the Product Certification link on <http://www.rockwellautomation.com/global/certification/overview.page> for declarations of conformity, certificates, and other certification details.

## Technical Specifications

This section provides technical specifications for the PanelView 5310 terminals.

### Technical Specifications - PanelView 5310 Terminals

Attribute	7-in. Wide Touch	9-in. Wide Touch	12.1-in. Wide Touch
	2713P-T7WD1 2713P-T7WD1-B <sup>(1)</sup>	2713P-T9WD1 2713P-T9WD1-B <sup>(1)</sup>	2713P-T12WD1 2713P-T12WD1-B <sup>(1)</sup>
Operator input	Touch		
Display type	Color TFT LCD (thin-film-transistor, liquid-crystal display)		
Display size, diagonal	7-in. wide screen	9-in. wide screen	12.1-in. wide screen
Viewing area, W x H	152 x 91 mm (6.0 x 3.6 in.)	196 x 118 mm (7.7 x 4.6 in.)	261 x 163 mm (10.3 x 6.4 in.)
Display resolution/ aspect ratio	800 x 480 WVGA, 5:3	800 x 480 WVGA, 5:3	1280 x 800 WXGA, 16:10
Color depth	24-bit color graphics (16.7 million colors)		
Brightness, typical	300 cd/m <sup>2</sup> (Nits)		
Backlight	Light-emitting diode, non-replaceable Life: 50,000 h min at 40 °C (104 °F) to half-brightness		
Backlight power consumption, typical	3 W	3.5 W	5 W
Touch screen	Analog resistive Actuation rating: 1 million presses Operating force: < 100 grams		
Battery (real time clock backup)	Accuracy: +/-2 minutes per month. Battery life: 4 years min at 25 °C (77 °F) Replacement: CR2032 lithium coin cell		
Memory RAM User available	1 GB RAM 500 MB nonvolatile storage for projects		
Secure Digital (SD) card slot	One SD card slot for external storage; supports cat. no. 1784-SDx cards.		
USB ports Host Device	One USB high-speed 2.0 host port (type A) supports removable flash drives for external storage. One high-speed 2.0 device port (type B) supports connection to host computer (available in a future release).		
Ethernet port	One 10/100Base-T, Auto MDI/MDI-X Ethernet port for controller communication.		
Status indicators	STS (status, green), ERR (error, red)		
Software	Studio 5000 environment provides single portal to View Designer and Logix Designer applications.		
Electrical			
USB host port (type A)	0.5 A at 5V DC		
Input voltage	24V DC nom (18...30V DC)	24V DC nom (18...30V DC)	24V DC nom (18...30V DC)
Power consumption, max	13 W max (0.54 A at 24V DC)	14 W max (0.58 A at 24V DC)	16 W max (0.67 A at 24V DC)
Power consumption, typical	9 W	11 W	12 W
Power dissipation	31 BTU/hr.	38 BTU/hr.	41 BTU/hr.
Inrush current, typical	15 A		
Power supply	Supports SELV and PELV 24V DC supplies <sup>(2)</sup>	Supports SELV and PELV 24V DC supplies <sup>(2)</sup>	Supports SELV and PELV 24V DC supplies <sup>(2)</sup>

**Technical Specifications - PanelView 5310 Terminals (continued)**


Attribute	7-in. Wide Touch	9-in. Wide Touch	12.1-in. Wide Touch
	2713P-T7WD1 2713P-T7WD1-B <sup>(1)</sup>	2713P-T9WD1 2713P-T9WD1-B <sup>(1)</sup>	2713P-T12WD1 2713P-T12WD1-B <sup>(1)</sup>
<b>Mechanical</b>			
Weight, approx	2.0 kg (4.4 lb)	2.41 kg (5.31 lb)	3.65 kg (8.0 lb)
Dimensions, H x W x D, approx	178 x 237 x 69.6 mm (7.0 x 9.3 x 2.74 in.)	190 x 280 x 69.6 mm (7.48 x 11.02 x 2.74 in.)	246 x 340 x 69.6 mm (9.69 x 13.39 x 2.74 in.)
Cutout dimensions, H x W, approx	148 x 207 mm (5.82 x 8.15 in.)	162 x 252 mm (6.38 x 9.92 in.)	218 x 312 mm (8.58 x 12.28 in.)

- (1) Add -B to the end of a catalog number to order a terminal without the Allen-Bradley® logo and product identification, for example, 2713P-T7WD1-B.
- (2) DC-powered terminals support safety extra low voltage (SELV) and protective extra-low voltage (PELV) 24V DC power supplies, such as catalog numbers 1606-XLP95E, 1606-XLP100E, and 2711P-RSACDIN.

**Product Dimensions**

This section provides dimensions for the PanelView 5310 terminals. The 9-inch wide touch terminal is shown for illustrative purposes. All other terminal sizes look similar.

**PanelView 5310 Terminal Dimensions - (9-in. wide terminal shown)**

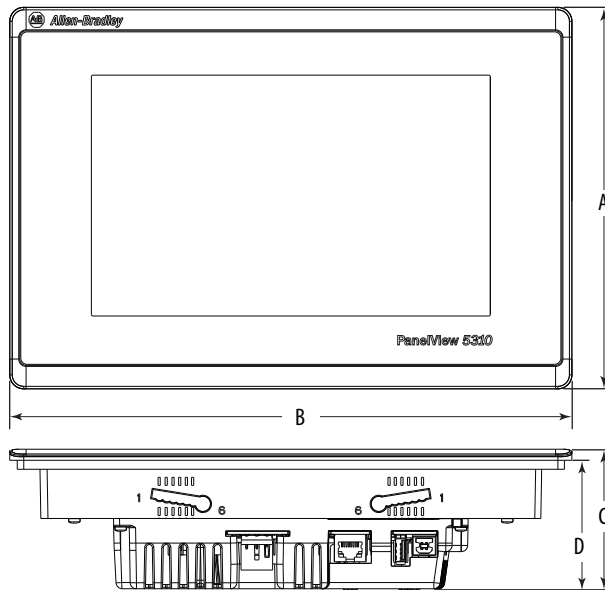

**PanelView 5310 Terminal Dimensions**

Terminal Size	Input Type	A	B	C	D
		Height mm (in.)	Width mm (in.)	Overall Depth mm (in.)	Mounted Depth mm (in.)
7-in. wide	Touch	178 (7.0)	236 (9.3)	69.6 (2.74)	63.6 (2.50) <sup>(1)</sup>
9-in. wide		190 (7.48)	280 (11.02)		
12.1-in. wide		246 (9.69)	340 (13.39)		

(1) When mounted in a panel, the front of the bezel extends less than 6.36 mm (0.25 in.) from the panel.

## Studio 5000 Environment

Use the Studio 5000 environment to create HMI applications for the PanelView 5310 terminal platform.

This environment includes these major components:

- **Studio 5000 View Designer**<sup>®</sup> – you can create and design a project for a specific PanelView 5310 terminal and download the project to the terminal. You can create an application for any PanelView 5310 terminal and reuse that same application across the entire platform.
- **Studio 5000 Logix Designer**<sup>®</sup> – you can develop control logic for a CompactLogix or ControlLogix controller and download the logic to the controller.



In the Studio 5000 environment, you can create an application for any PanelView 5310 terminal and reuse that same application across the entire platform.

## Accessories

This section lists accessories for the PanelView 5310 terminals.

### Power Supplies and Replacement Power Terminal Blocks

Cat. No.	Description	Quantity
1606-XLB120E	DIN rail power supply, 24...28V DC output voltage, 120 W	1
1606-XLP100E	DIN rail power supply, 24...28V DC output voltage, 100 W	1
1606-XLP95E	DIN rail power supply, 24...28V DC output voltage, 95 W	1
2711P-RSACDIN	DIN rail power supply, AC-to-DC, 85...265V AC, 47...63 Hz	1
2711-TBDC	3-pin DC power terminal block	10

### Mounting Hardware

Cat. No.	Description	Quantity
2711P-RMCP <sup>(1)</sup>	Mounting levers (black)	16

(1) Catalog number 2711P-RMCP mounting levers are used with the PanelView 5310 terminals. Do not use gray mounting levers; they are not compatible with PanelView 5310 terminals.

### SD Cards<sup>(1)</sup>

Cat. No.	Description
1784-SD1	1 GB SD card
1784-SD2	2 GB SD card
2711C-RCSD	USB to SD adapter for SD card

(1) To reduce the chance of corruption when using SD Cards or USB drives with the terminal, Rockwell Automation recommends that you use SD Card catalog numbers 1784-SD1 or 1784-SD2.

**USB Programming Cable**

Cat. No.	Description	Length
6189V-USBCBL2	Programming cable that connects the device port of the terminal to a USB host port of a computer	1.8 m (5.9 ft)

**Battery Replacement**

Cat. No.	Description	Quantity
2711P-RY2032	Lithium coin cell battery, CR2032 equivalent	1

**Additional Resources**

These documents contain more information about related products from Rockwell Automation.

Resource	Description
Visualization Solutions Selection Guide, publication <a href="#">VIEW-SG001</a>	Provides an overview of the visualization products (includes catalog number selections) offered by Rockwell Automation.
PanelView 5310 Terminals User Manual, publication <a href="#">2713P-UM001</a>	Provides information on how to install, operate, configure, and troubleshoot the PanelView 5310 terminals.
Industrial Automation Wiring and Grounding Guidelines, publication <a href="#">1770-4.1</a>	Provides general guidelines on how to install a Rockwell Automation industrial system.
Product Certifications website, <a href="http://www.rockwellautomation.com/global/certification/overview.page">http://www.rockwellautomation.com/global/certification/overview.page</a>	Provides declarations of conformity, certificates, and other certification details.

You can view or download publications at <http://www.rockwellautomation.com/global/literature-library/overview.page>. To order paper copies of technical documentation, contact your local Allen-Bradley distributor or Rockwell Automation sales representative.

**Notes:**

## Rockwell Automation Support

Use the following resources to access support information.

<b>Technical Support Center</b>	Knowledgebase Articles, How-to Videos, FAQs, Chat, User Forums, and Product Notification Updates.	<a href="http://www.rockwellautomation.com/knowledgebase">www.rockwellautomation.com/knowledgebase</a>
<b>Local Technical Support Phone Numbers</b>	Locate the phone number for your country.	<a href="http://www.rockwellautomation.com/global/support/get-support-now.page">www.rockwellautomation.com/global/support/get-support-now.page</a>
<b>Direct Dial Codes</b>	Find the Direct Dial Code for your product. Use the code to route your call directly to a technical support engineer.	<a href="http://www.rockwellautomation.com/global/support/direct-dial.page">www.rockwellautomation.com/global/support/direct-dial.page</a>
<b>Literature Library</b>	Installation Instructions, Manuals, Brochures, and Technical Data.	<a href="http://www.rockwellautomation.com/literature">www.rockwellautomation.com/literature</a>
<b>Product Compatibility and Download Center (PCDC)</b>	Get help determining how products interact, check features and capabilities, and find associated firmware.	<a href="http://www.rockwellautomation.com/global/support/pcdc.page">www.rockwellautomation.com/global/support/pcdc.page</a>

## Documentation Feedback

Your comments will help us serve your documentation needs better. If you have any suggestions on how to improve this document, complete the How Are We Doing? form at [http://literature.rockwellautomation.com/idc/groups/literature/documents/du/ra-du002\\_-en-e.pdf](http://literature.rockwellautomation.com/idc/groups/literature/documents/du/ra-du002_-en-e.pdf).

Rockwell Automation maintains current product environmental information on its website at <http://www.rockwellautomation.com/rockwellautomation/about-us/sustainability-ethics/product-environmental-compliance.page>.

Allen-Bradley, CompactLogix, ControlLogix, LISTEN. THINK. SOLVE., PanelView, Rockwell Automation, Rockwell Software, Studio 5000, Studio 5000 View Designer, and Studio 5000 Logix Designer are trademarks of Rockwell Automation, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Otomasyon Ticaret A.Ş., Kar Plaza İş Merkezi E Blok Kat:6 34752 İçerenköy, İstanbul, Tel: +90 (216) 5698400

**[www.rockwellautomation.com](http://www.rockwellautomation.com)**

### Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846