


Inductive Proximity Sensors


Catalog Numbers 937ZH-DPBN-1, 937ZH-DPBN-2, 937ZH-DPDP-2

Division 1 Installation Wiring Diagrams

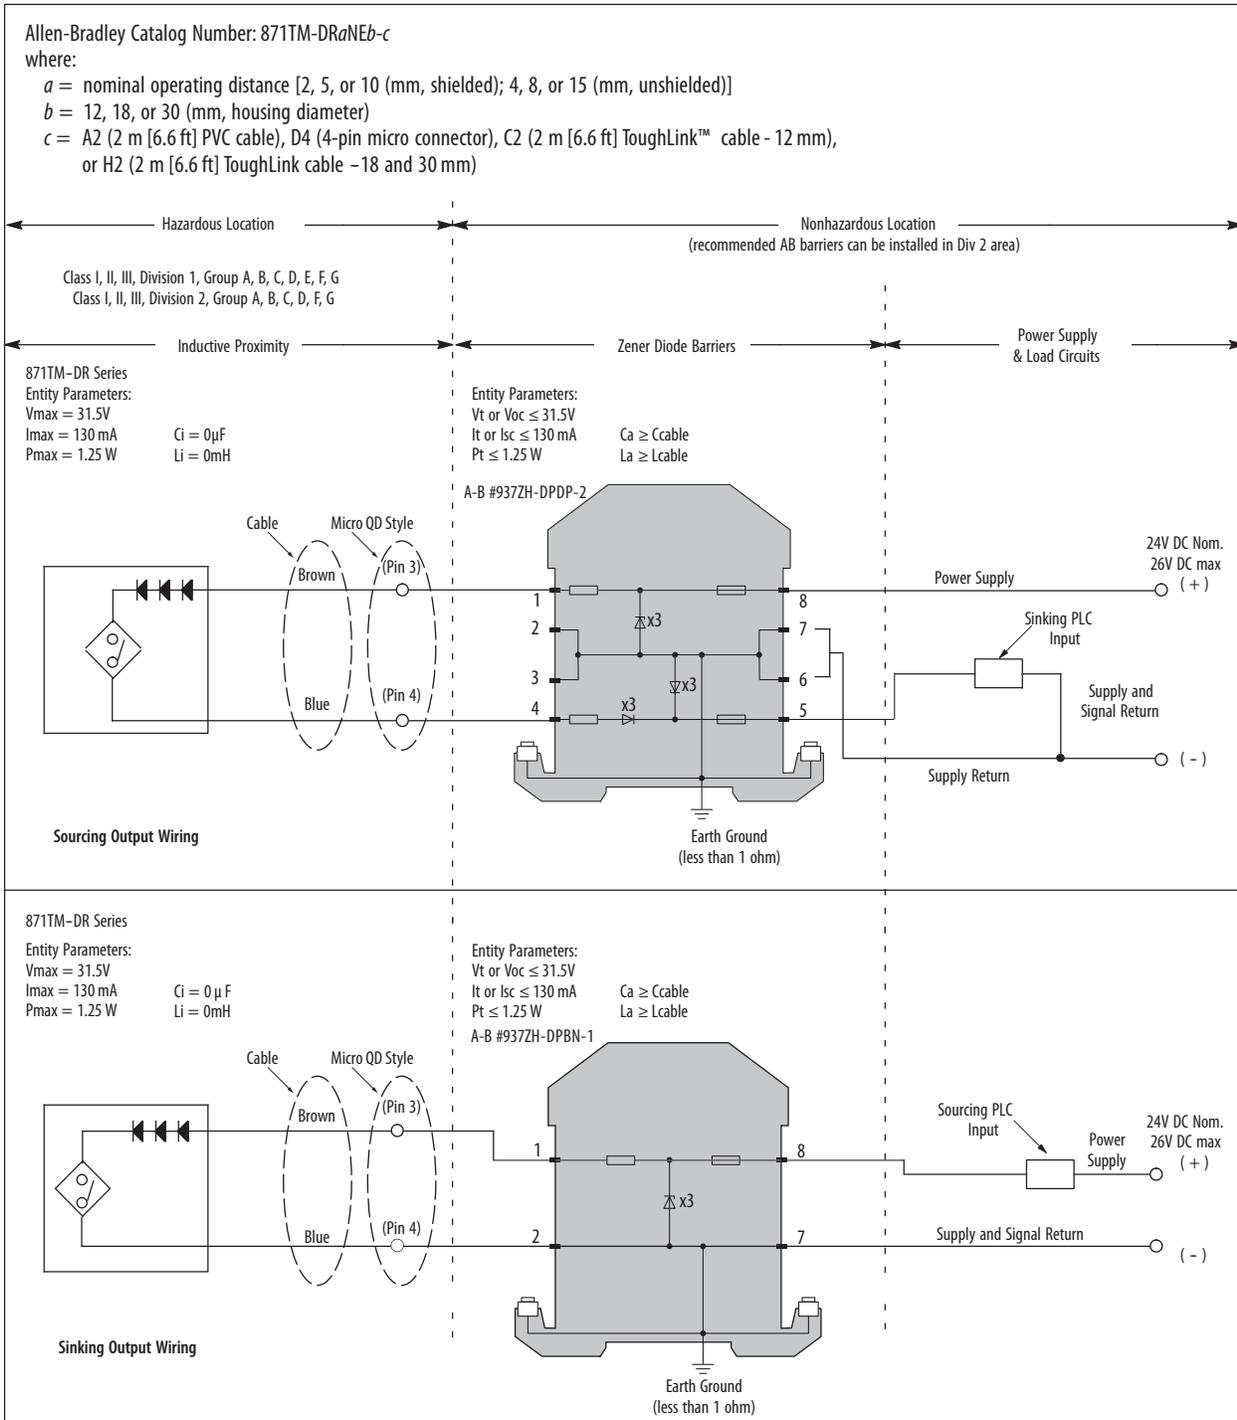

ATTENTION: These parameters must be adhered to. If not, injury may be caused to person or property.

IMPORTANT Cordset (Cat. No. 889D-F4LC-2) is suggested for Micro QD: blue wire (pin 3); black wire (pin 4)

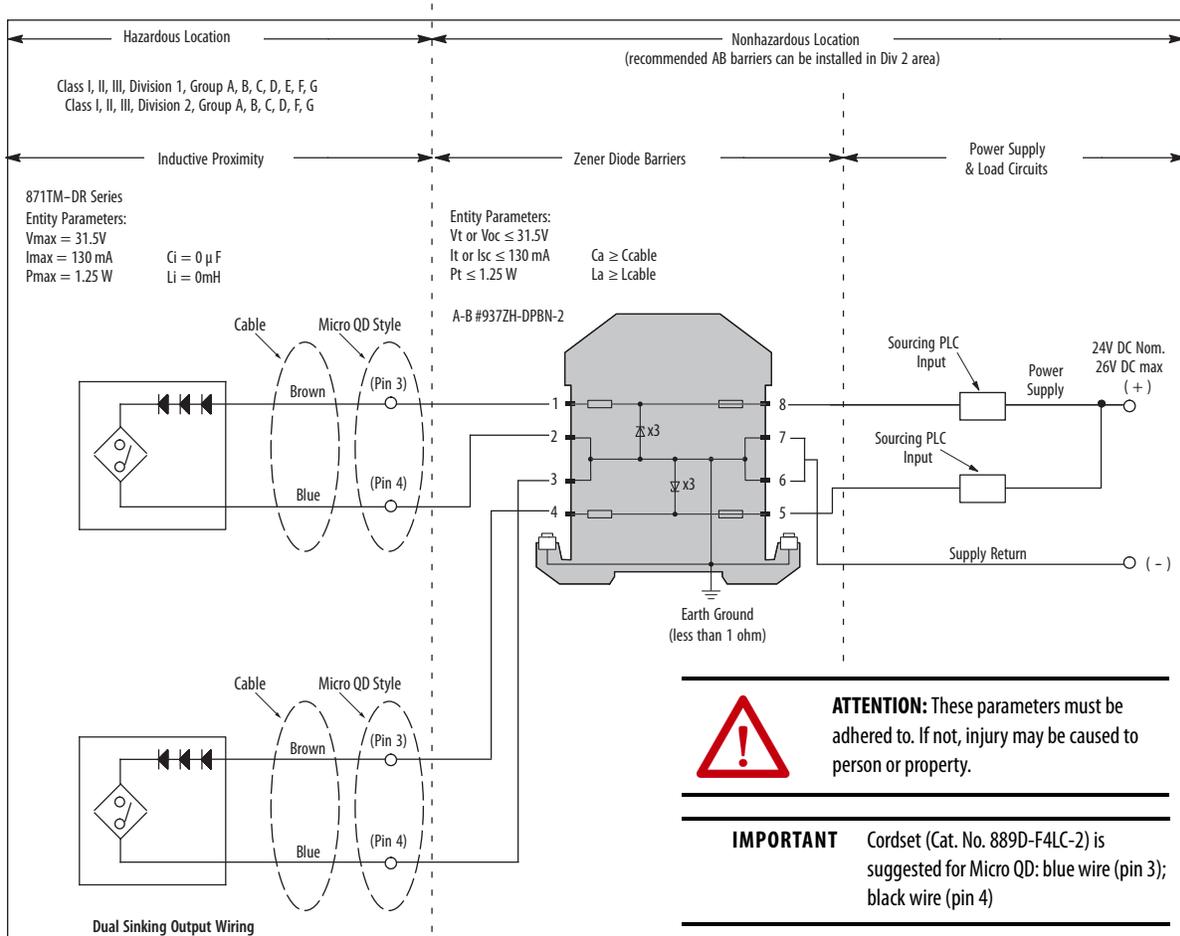

Factory Mutual Installation Notes:

1. Installation must be in accordance with the National Electrical Code® (NFPA 70, Article 504), ANSI/ISA-RP12.6, and manufacturer instructions.
2. If the electrical parameters of the cable that is used are unknown, the following values may be used: Capacitance — 60 pF/ft.; Inductance — 0.20 μH/ft.
3. The wiring between each Inductive Proximity Sensor and its corresponding channel of the dual-channel barrier is a separate intrinsically safe circuit. Each of the two separate intrinsically safe circuits shall be in separate cables or shall be separated from each other as specified in NEC 504-30. The supply return conductors may be connected at the grounding terminal of the barrier.
4. The Barrier bus must be insulated from other grounded metal. Use Power Rail 937A-PR08, 937A-PR20 and Power Feed Module 937A-PSFD.
5. The maximum nonhazardous location voltage must not exceed 250V AC or DC.
6. Barriers are not required for Division 2 (31.5V DC max). Division 2 applications must be installed in accordance with the NEC.



ATTENTION: Substitution of components may impair Intrinsic Safety.

7. No revision to drawing without prior FMRC approval.

Canadian Standards Association Installation Notes:

1. Installation must be in accordance with the Canadian Electrical Code (Part I), ANSI/ISA-RP12.6, and manufacturer instructions.
2. If the electrical parameters of the cable that is used are unknown, the following values may be used: Capacitance — 60 pF/ft.; Inductance — 0.20 μH/ft.
3. The wiring between each Inductive Proximity Sensor and its corresponding channel of the dual-channel barrier is a separate intrinsically safe circuit. Each of the two separate intrinsically safe circuits shall be in separate cables or shall be separated from each other as specified in CEC. The supply return conductors may be connected at the grounding terminal of the barrier.
4. The Barrier bus must be insulated from other grounded metal. Use Power Rail 937A-PR08, 937A-PR20 and Power Feed Module 937A-PSFD.
5. The maximum nonhazardous location voltage must not exceed 250V AC or DC.
6. Barriers are not required for Division 2 (31.5V DC max). Division 2 applications must be installed in accordance with the CEC.
7. In Division 2 applications without barriers, observe the following warnings:



ATTENTION:

- Do not disconnect equipment unless power has been switched off or the area is known to be nonhazardous.
- Substitution of components may impair Intrinsic Safety.

8. No revision to drawing without prior CSA approval.

Rockwell Automation maintains current product environmental information on its website at <http://www.rockwellautomation.com/rockwellautomation/about-us/sustainability-ethics/product-environmental-compliance.page>.

Allen-Bradley, Rockwell Automation, Rockwell Software, and ToughLink are trademarks of Rockwell Automation, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Otomasyon Ticaret A.Ş., Kar Plaza İş Merkezi E Blok Kat:6 34752 İçerenköy, İstanbul, Tel: +90 (216) 5698400

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Publication 871TM-IN003B-EN-P - January 2020

Supersedes Publication 871TM-IN003A-EN-P - February 2016

75001-437-01(05)

Copyright © 2020 Rockwell Automation, Inc. All rights reserved. Printed in the U.S.A.