


# Cutout Templates for PanelView Plus 7 Performance and PanelView 5500 Terminals

Printed actual size (scale = 1:1). If you print this cutout template from the PDF, set the paper size on your plotter or printer to 21 x 18 inches.

## PanelView Plus 7 Performance and PanelView 5500 Touch Screen Terminals





Rotate each lever (or torque each clip) to its final lock position using the sequence shown for your terminal size. The arrows indicate the direction to rotate each lever.

See the PanelView Plus 7 Performance Terminals User Manual, publication [2711P-UM008](#), for complete installation instructions.



See the PanelView 5500 Terminal User Manual, publication [2715-UM001](#), for complete installation instructions.

PanelView Plus 7 Performance Stainless Steel Terminals with Mounting Clips




Torque each mounting clip to 2.3...2.6 N·m (20...23 lb·in).


PanelView Plus 7 Performance and PanelView 5500 Touch Screen Terminals with Mounting Levers

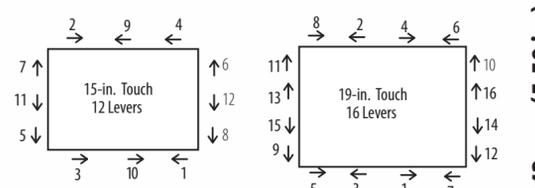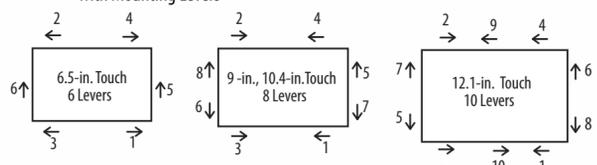

Lever Lock Position	Panel Thickness Range	Typical Gauge
1	1.50...2.01 mm (0.060...0.079 in.)	16
2	2.03...2.64 mm (0.080...0.104 in.)	14
3	2.67...3.15 mm (0.105...0.124 in.)	12
4	3.17...3.66 mm (0.125...0.144 in.)	10
5	3.68...4.16 mm (0.145...0.164 in.)	8/9
6	4.19...4.80 mm (0.165...0.188 in.)	7

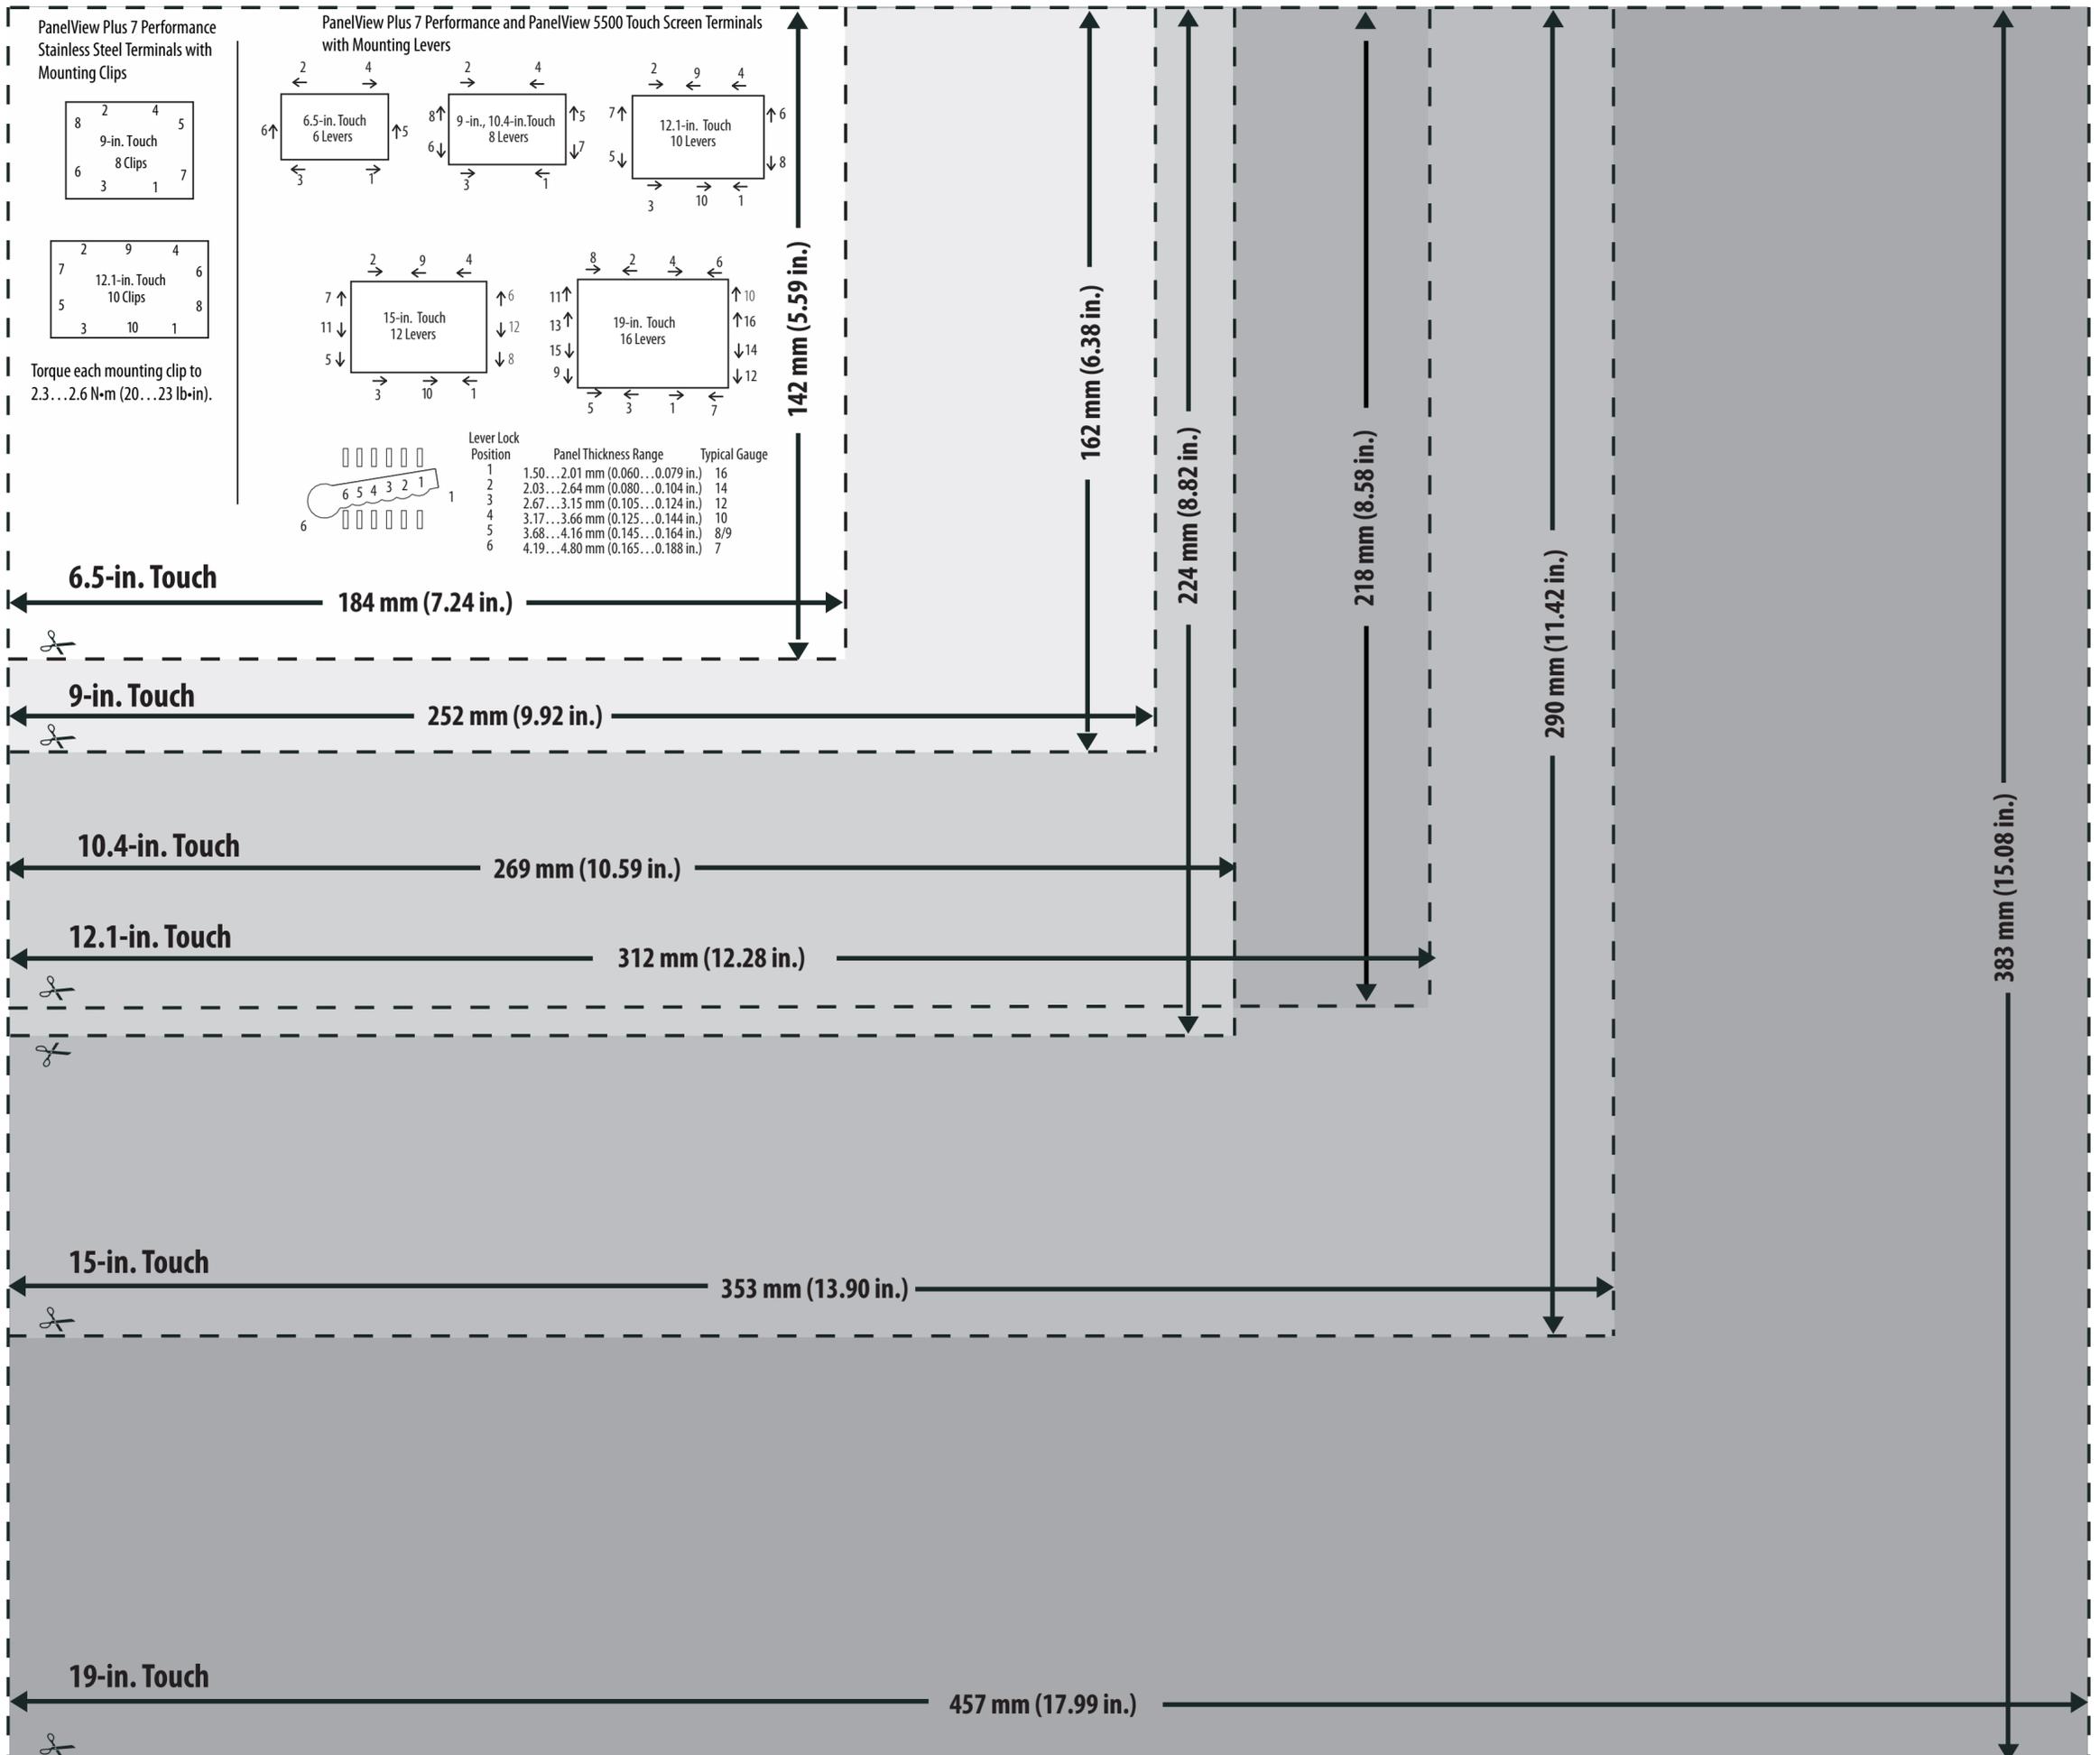


## PanelView Plus 7 Performance and PanelView 5500 Keypad with Touch Screen Terminals



Rotate each lever to its final lock position using the sequence shown for your terminal size. The arrows indicate the direction to rotate each lever.

See the PanelView Plus 7 Performance Terminals User Manual, publication [2711P-UM008](#), for complete instructions.

See the PanelView 5500 Terminal User Manual, publication [2715-UM001](#), for complete instructions.

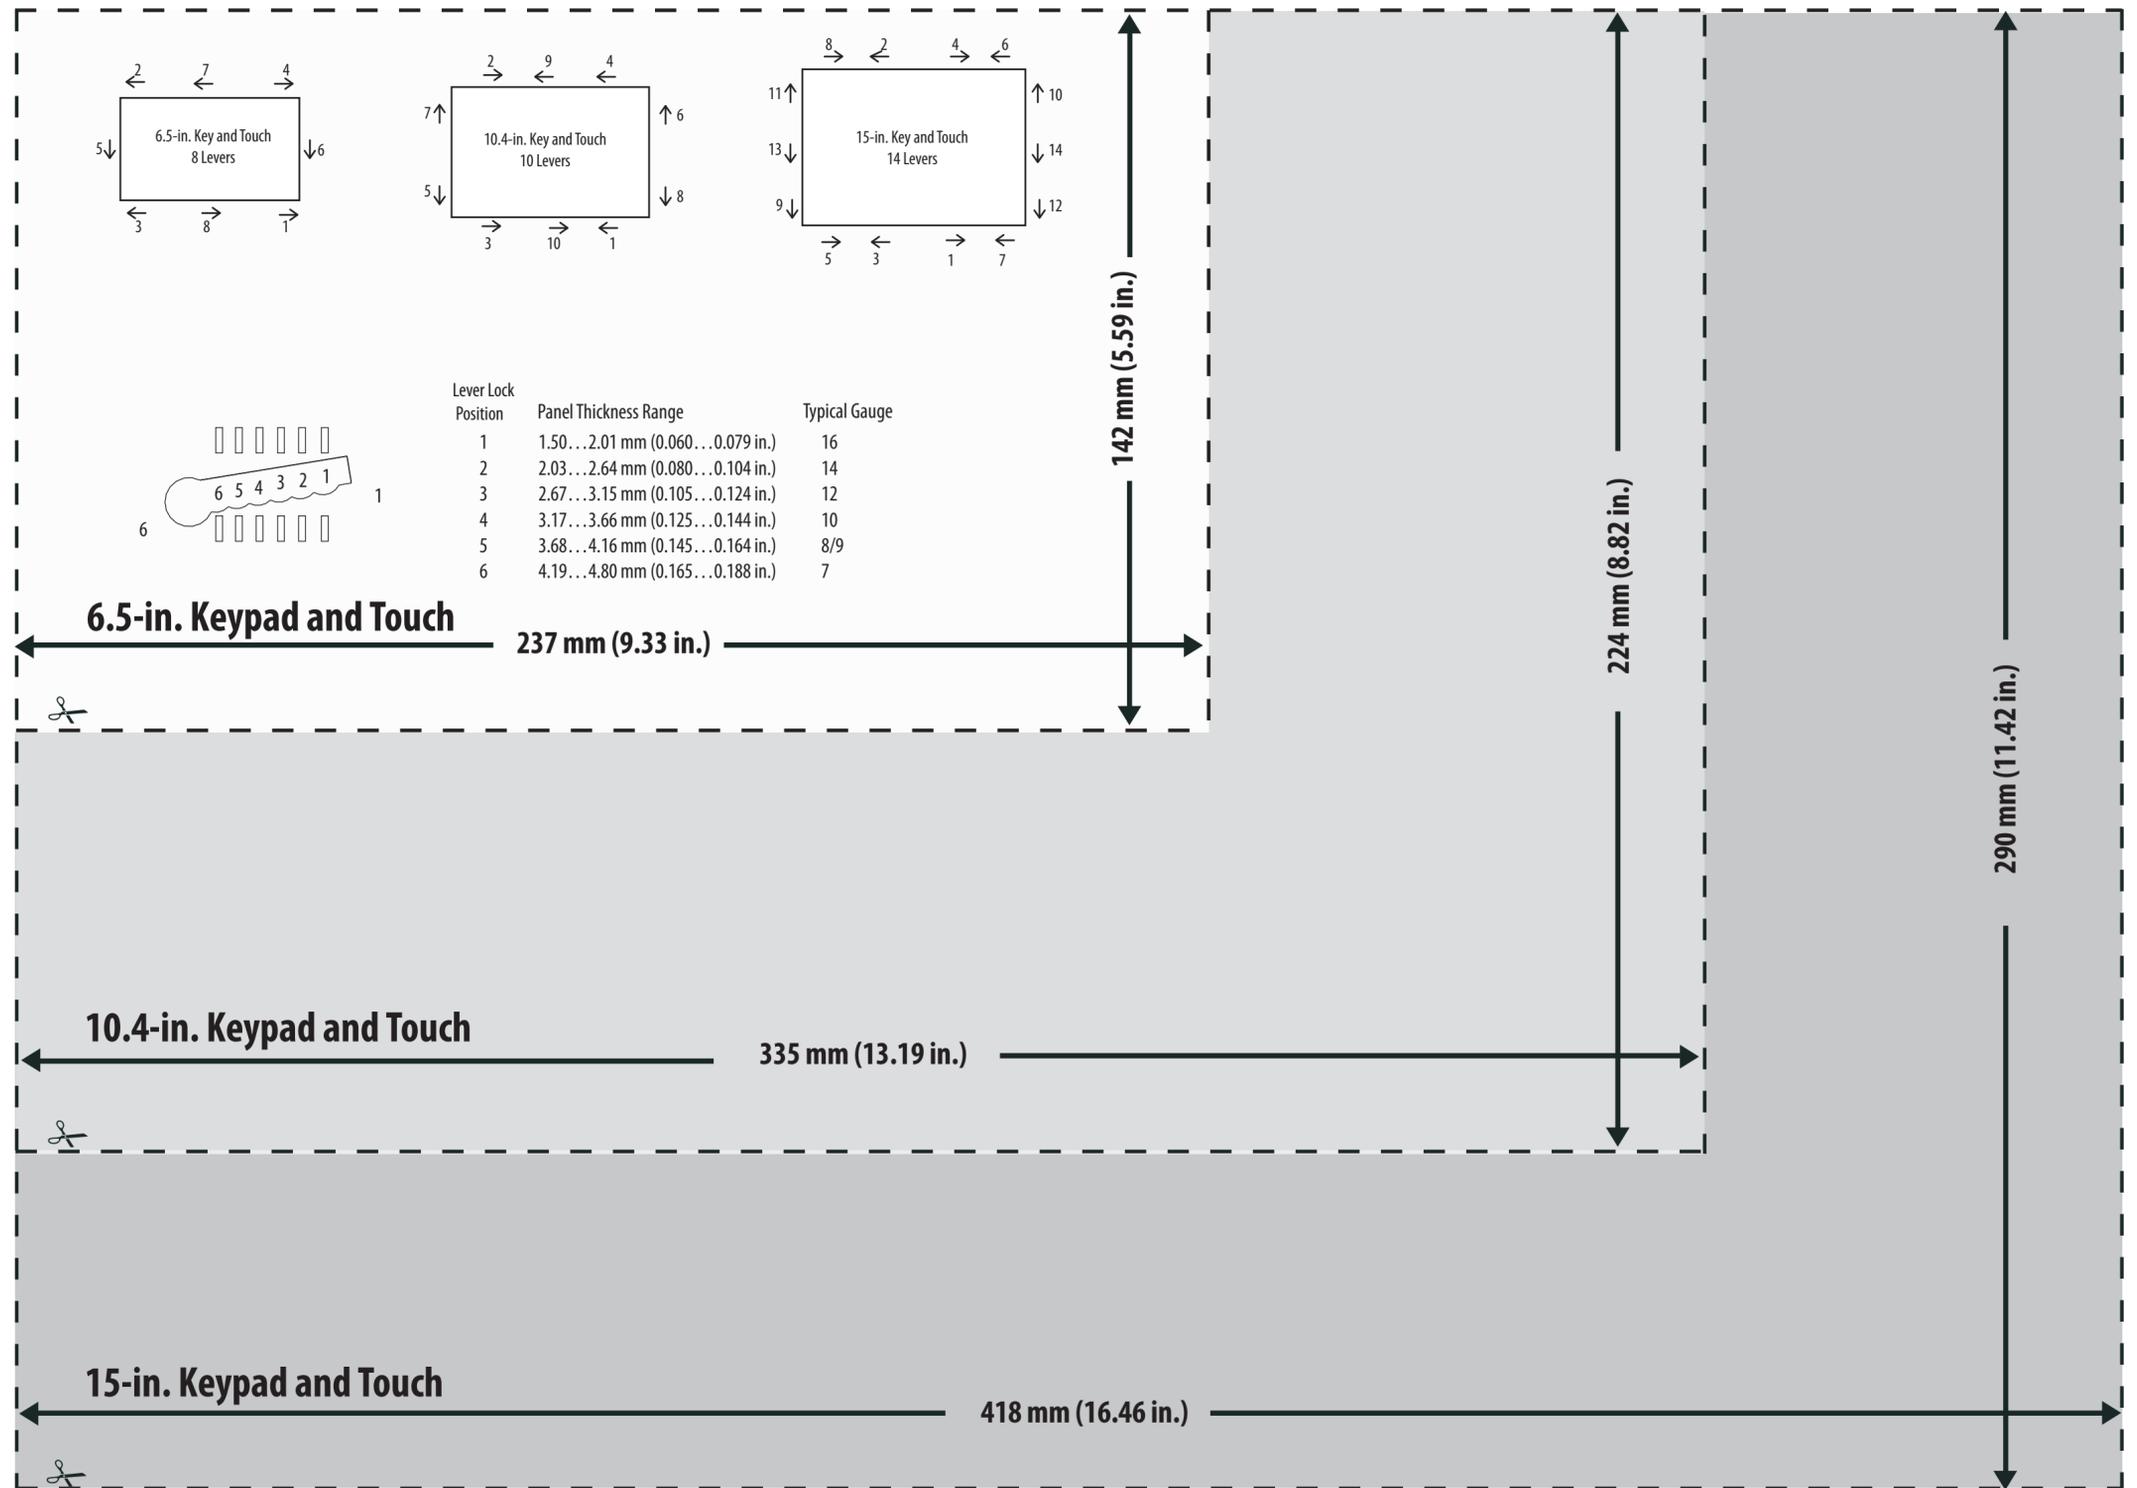

Rockwell Automation maintains current product environmental information on its Product Compliance website at <http://www.rockwellautomation.com/rockwellautomation/about-us/sustainability-ethics/product-environmental-compliance-page>.

Allen-Bradley, PanelView, and Rockwell Automation are trademarks of Rockwell Automation, Inc. Trademarks not belonging to Rockwell Automation are property of their respective companies.

[www.rockwellautomation.com](http://www.rockwellautomation.com)

### Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444  
 Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640  
 Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Publication VIEW-DS001B-EN-P - June 2017  
 Supersedes Publication VIEW-DS001A-EN-P - March 2015

